

Amperex

3-500Z

High-MU Power Triode

- Heavy Graphite anode for high intermittent overload capabilities.
- A Zirconium coated anode to absorb gas for longer life.

GENERAL DATA^{Note 1}

Electrical:

Filament-Thoriated Tungsten

Voltage 5.0 ±0.25 V

Current, at 5.0 volts 14.6 A

Characteristics:

Amplification Factor (average) 130

Direct Interelectrode Capacitances (grounded filament)²

Input 8.3 pF

Output 0.07 pF

Feedback 4.7 pF

Direct Interelectrode (grounded grid)^{Note 2}

Input 8.3 pF

Output 4.7 pF

Feedback 0.07 pF

Frequency of Maximum Rating:

CW 110 MHz

Mechanical:

Maximum Overall Dimensions:

Length 6.10 in; 154.94 mm

Diameter 3.44 in; 87.33 mm

Mounting Position

Vertical, base down or up

Maximum Operating Temperature:

Plate Seal 225 °C


Base Seals 200 °C

Cooling

Radiation and forced air

Base

5 Pin Special

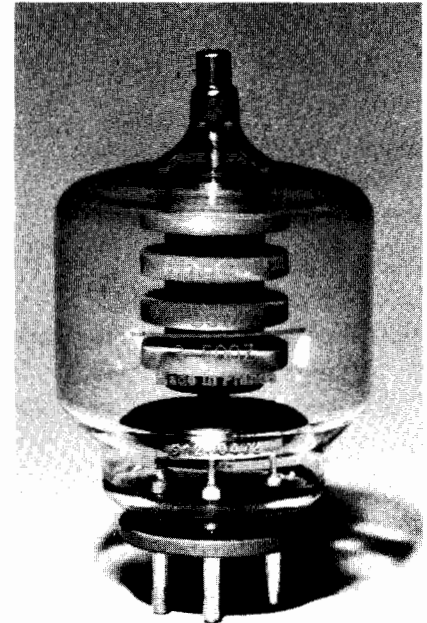

Notes:

1. Characteristics and operating values are based upon performance tests. These figures may change without notice as the result of additional data or product refinement. Richardson Electronics, Ltd. should be consulted before using this information for final equipment design.

2. In Shielded Fixture.

Avenue du 4 Juillet 1776
Z.I. La Marquisie, B.P. 25
19101 Brive Cedex
France



Richardson Electronics, Ltd.

40W267 Keslinger Road
LaFox, IL 60147
USA
(708) 208-2200

Amperex

3-500Z

RADIO FREQUENCY LINEAR AMPLIFIER

Cathode Driven

Class AB2

LIMITING VALUES (Absolute Limits)

Frequency	f	up to 110	MHz
Anode Voltage	V_a	max. 4000	Vdc
Anode Current	I_a	max. 400	mAdc
Anode Dissipation	P_a	max. 500	W
Grid Dissipation	P_g	max. 20	W

OPERATING CONDITIONS

	1500		2500		3500		Vdc
Anode VoltageV _a	1500		2500		3500		Vdc
Cathode grid VoltageV _{kg}	0		0		+15		Vdc
Anode Current (zero signal)I _{ao}	65		130		53		mAdc
	Single Tone	Two Tone	Single Tone	Two Tone	Single Tone	Two Tone	
Anode CurrentI _a	400	260	400	280	400	262	mAdc
Grid CurrentI _g	130	80	120	70	108	58	mAdc
Anode Input PowerP _{ia}	600		1000		1400		W
Anode Output PowerP _o	330		600		890		W
(CW or PEP)							
Driving Power (max. signal)P _{dr}	49		46		46		W
Intermodulation ProductsIMP	-46		-33		-40		db
(3rd order)							
Resonant Load Impedance	1600		3450		5000		Ohms
Driving Impedance	94		100		115		Ohms

Note: Currents listed correspond to SSB or "2-tone" average current at peak of signal envelope.

RADIO FREQUENCY LINEAR POWER AMPLIFIER OR OSCILLATOR

Grid Driven, Cathode Driven

Class AB2 and Class C telegraphy or FM

LIMITING VALUES (Absolute Limits)

Frequency	f	up to 110	MHz
Anode Voltage	V_a	max. 4000	Vdc
Anode Current	I_a	max. 350	mAdc
Anode Dissipation	P_a	max. 500	W
Grid Dissipation	P_g	max. 20	W

OPERATING CONDITIONS

	GRID DRIVEN		CATHODE DRIVEN		
Anode Voltage	V_a	3000 3500	3000 3500		Vdc
Grid Voltage	V_g	-10 -75	-10 -75		Vdc
Anode Current	I_a	350 300	333 350		mAdc
Grid Current	I_g	115 115	108 118		mAdc
Athode Grid Peak	V_{kgr}	110 187	95 200		V
(RF Voltage)					
Anode Input Power	P_{ia}	1050 1050	1000 1225		W
Anode Dissipation	P_a	330 200	300 305		W
Anode Output Power	P_o	720 850	700 920		W
Resonant Load Impedance		4200 5700	4800 5500		Ohms
Driving Power (approx.)	P_{dr}	14 22	35 89		W

PLATE MODULATED RADIO FREQUENCY POWER AMPLIFIER

Grid Driven

Class C telephony (carrier conditions)

LIMITING VALUES (Absolute Limits)

Anode Voltage	V_a	3000	Vdc
Anode Current	I_a	0.275	Adc
Anode Dissipation	P_a	330	W(1)
Grid Dissipation	P_g	20	W(2)

(1) Corresponds to 500W at 100% sine-wave modulation

(2) Average, with or without modulation

OPERATING CONDITIONS

Frequency	f	30	MHz
Anode Voltage	V_a	3000	Vdc
Grid Voltage	V_{kg}	-100	Vdc
Anode Current	I_a	275	mAdc
Grid Current	I_g	120	mAdc
Anode Input Power	P_{ia}	825	W
Anode Output Power	P_o	640	W
Anode Dissipation	P_a	185	W
Peal RF Grid Voltage	V_{gp}	200	V
Driving Power	P_{dr}	25	W

AUDIO FREQUENCY POWER AMPLIFIER OR MODULATOR

Grid Driven, (CW)

Class AB2

Limiting Values (Absolute Limits per tube)

Anode Voltage	V_a	4000	Vdc
Anode Current	I_a	400	mAdc
Anode Dissipation	P_a	500	W
Grid Dissipation	P_g	20	W

OPERATING CONDITIONS (carrier conditions)

Anode Voltage	V_a	3000	Vdc
Grid Voltage	V_g	0	Vdc
Anode Current (zero signal)	I_{a0}	300	mAdc
Anode Current (max. signal)	I_a	770	mAdc
Grid Current (max. signal)	I_g	244	mAdc
Peal Grid Voltage (per. tube)	V_{kqp}	100	V
Anode Input Power	P_{ia}	2310	W
Anode Dissipation (max. signal)	P_a	890	W
Anode Output Power	P_o	1420	W
Resonant Load Impedance	R_{aa}	8600	Ohms
Peak Driving Power	P_{drp}	25	W(1)

(1) Nominal drive power is 1/2 peak driving power.

HIGH-LEVEL MODULATED RADIO FREQUENCY AMPLIFIER
PULSE WIDTH MODULATION


Grid Driven

LIMITING VALUES (Absolute Limits)		RF AMPLIFIER SWITCHING MODULATOR		
Anode Voltage	V_a	4	10	kVdc
Grid Voltage	V_g	-200	-200	Vdc
Anode Current	I_a	400	400	mAdc
Anode Dissipation	P_a	500	500	W
Grid Dissipation	P_g	20	20	W

OPERATING CONDITIONS (carrier conditions)		RF AMPLIFIER SWITCHING MODULATOR		
Anode Voltage	V_a	3	9	kVdc
Grid Voltage	V_{kg}	-85	-120	Vdc
Anode Current	I_a	250	180	mAdc
Grid Current	I_g	170	125	mAdc
Output Power	P_o	550	1500	W

Note: These conditions assume rectangular drive waveform and a third harmonic, high-efficiency "Tyler" circuit.

Figure 1 - Mechanical Outline

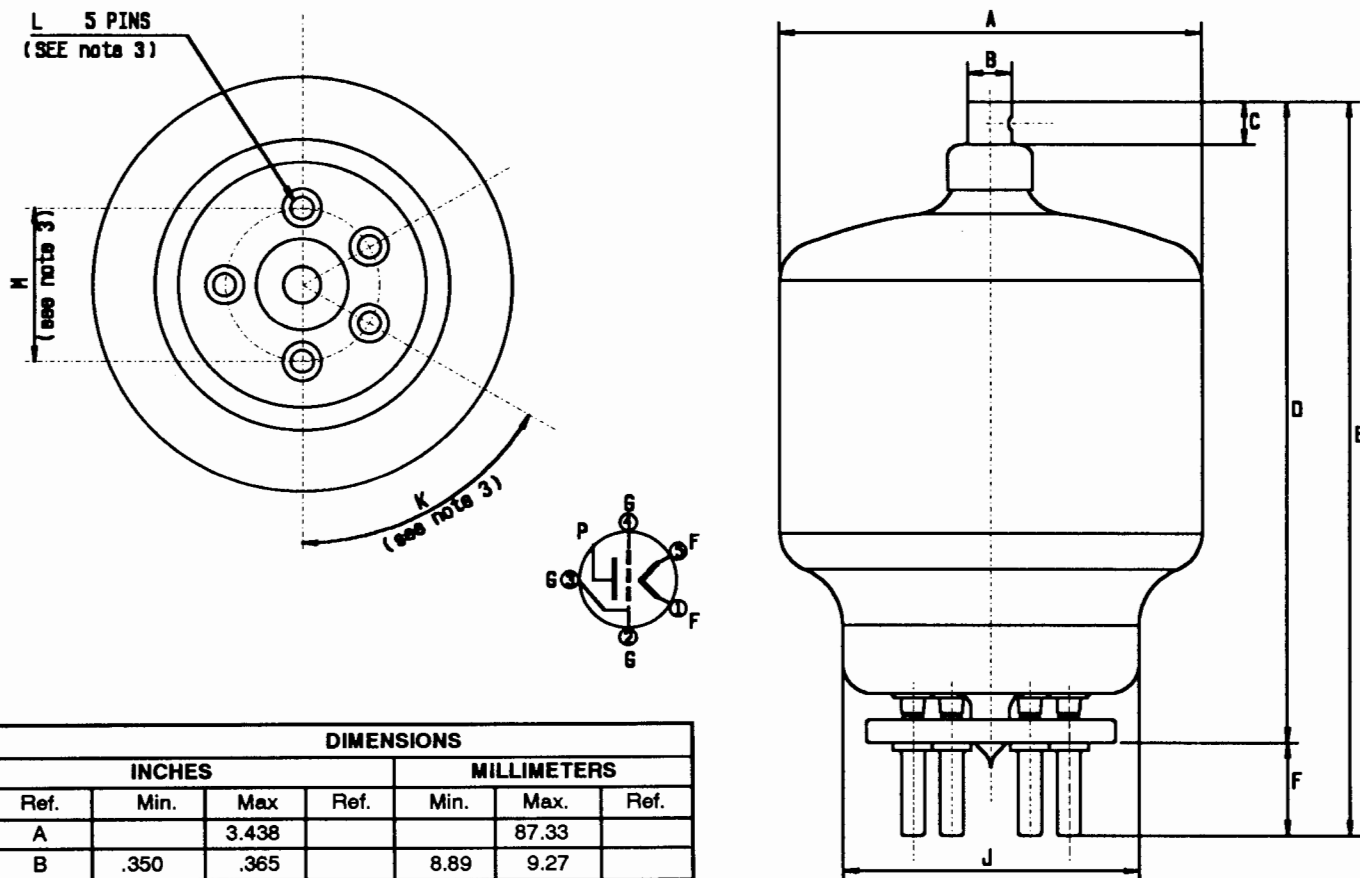

DIMENSIONS						
INCHES			MILLIMETERS			
Ref.	Min.	Max.	Ref.	Min.	Max.	Ref.
A		3.438			87.33	
B	.350	.365		8.89	9.27	
C	.328	.359		8.33	9.12	
D		5.200			132.1	
E	5.500	5.100		139.7	154.94	
F	.700			17.78		
J		2.500			63.5	
K			60°			60°
L	.185	.191		4.7	4.85	
M			1.250			31.75

MECHANICAL DATA:

Net Mass: 7.0 oz; 198.5g

NOTES:

1-Ref. Dimensions are for info only.

2- Metric equivalents are based on 1 inch = 25.4 mm.
(to the nearest 0.01mm).

3- Base pins L can be freely inserted into a gage 6.35 mm (1/4 inch) thick with holes
diameters 5.18 mm (.204 inch) located by the given dimensions K and M.

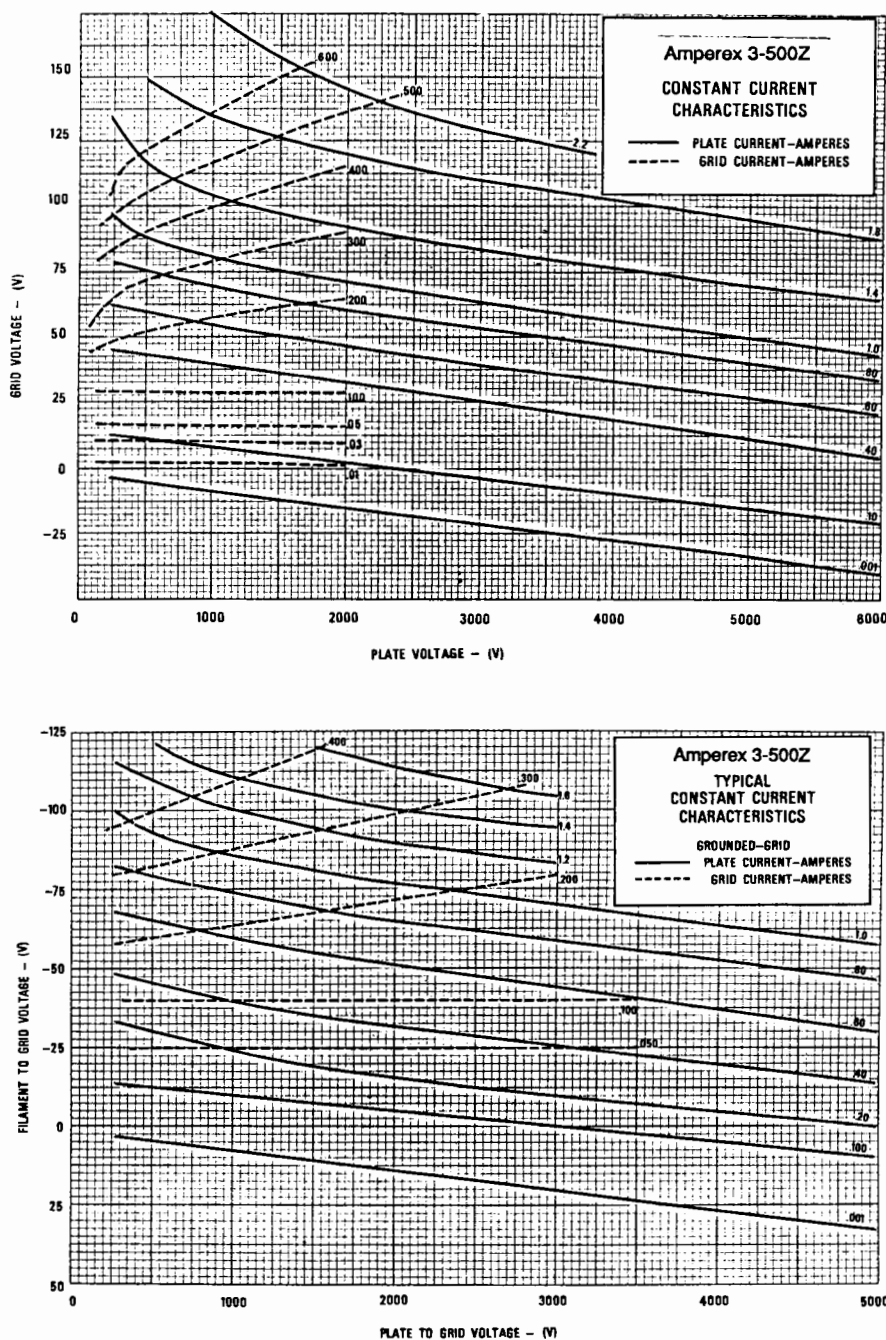


Figure 2 - Constant Current Characteristics

Richardson Electronics, Ltd. acquired Philips Electronics' transmitting tube operation in 1988. Richardson Electronics continues to manufacture these high quality electron tubes under the Amperex name.

Characteristics and operating values are based upon performance tests. These figures may change without notice as the result of additional data or product refinement. Richardson Electronics, Ltd. should be consulted before using this information for final equipment design.