




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

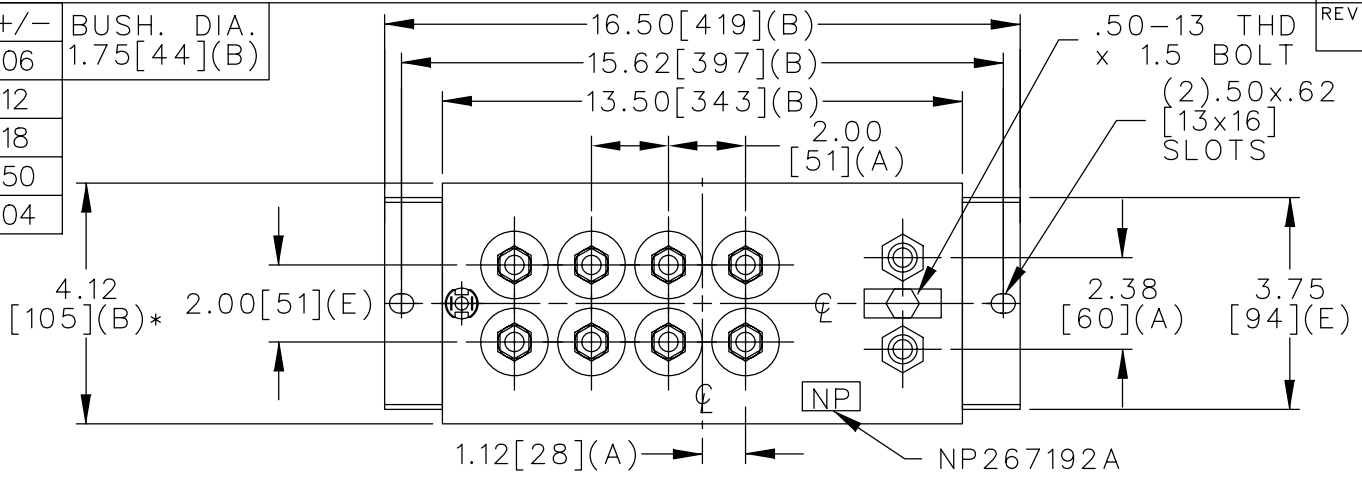

TERM	uF	kVAR
1	6.42	75
2	6.42	75
3	6.42	75
4	6.42	75
5	12.84	150
6	12.84	150
7	12.84	150
8	12.84	150

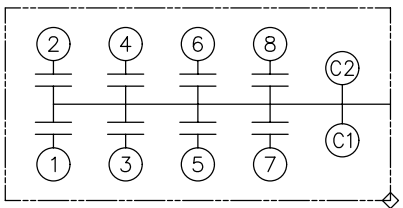

SCHEMATIC DIAGRAM - 801

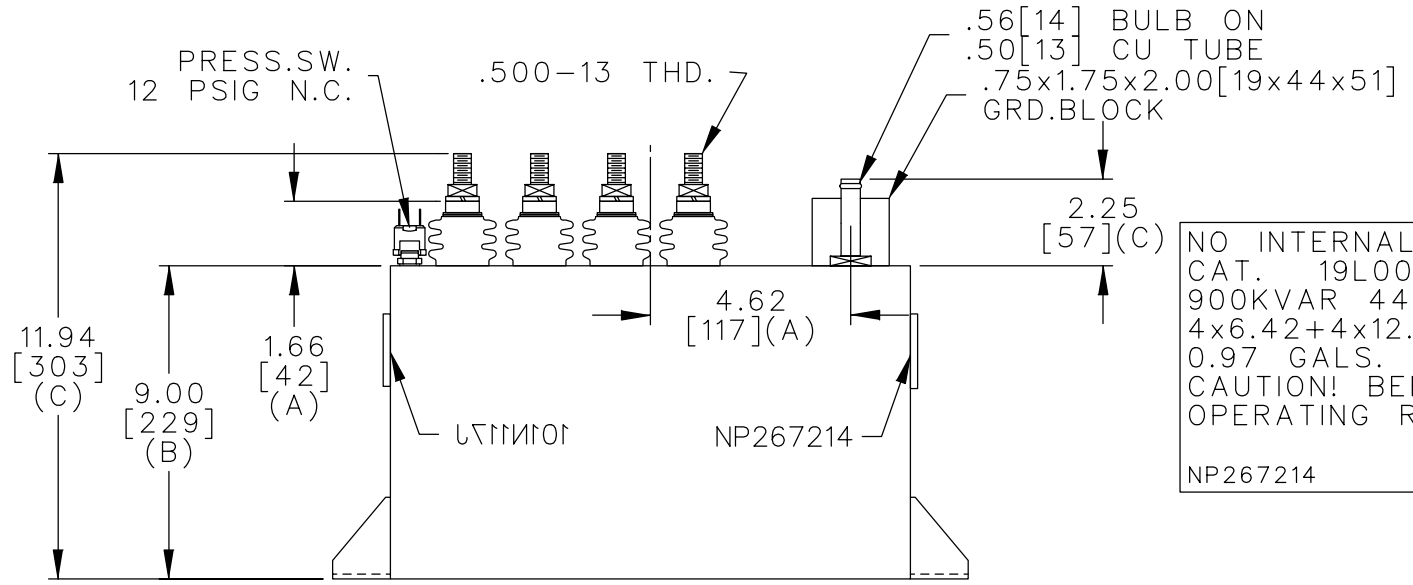

NO INTERNAL DISCH RESISTORS
 CAT. 19L0051WH4 SN
 900KVAR 440V 9600HZ 1PH
 4x6.42+4x12.84 UF/TAP
 0.97 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0051WH4	
	DRAWN E.McGINN	NOV. 30, 2000	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO