



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

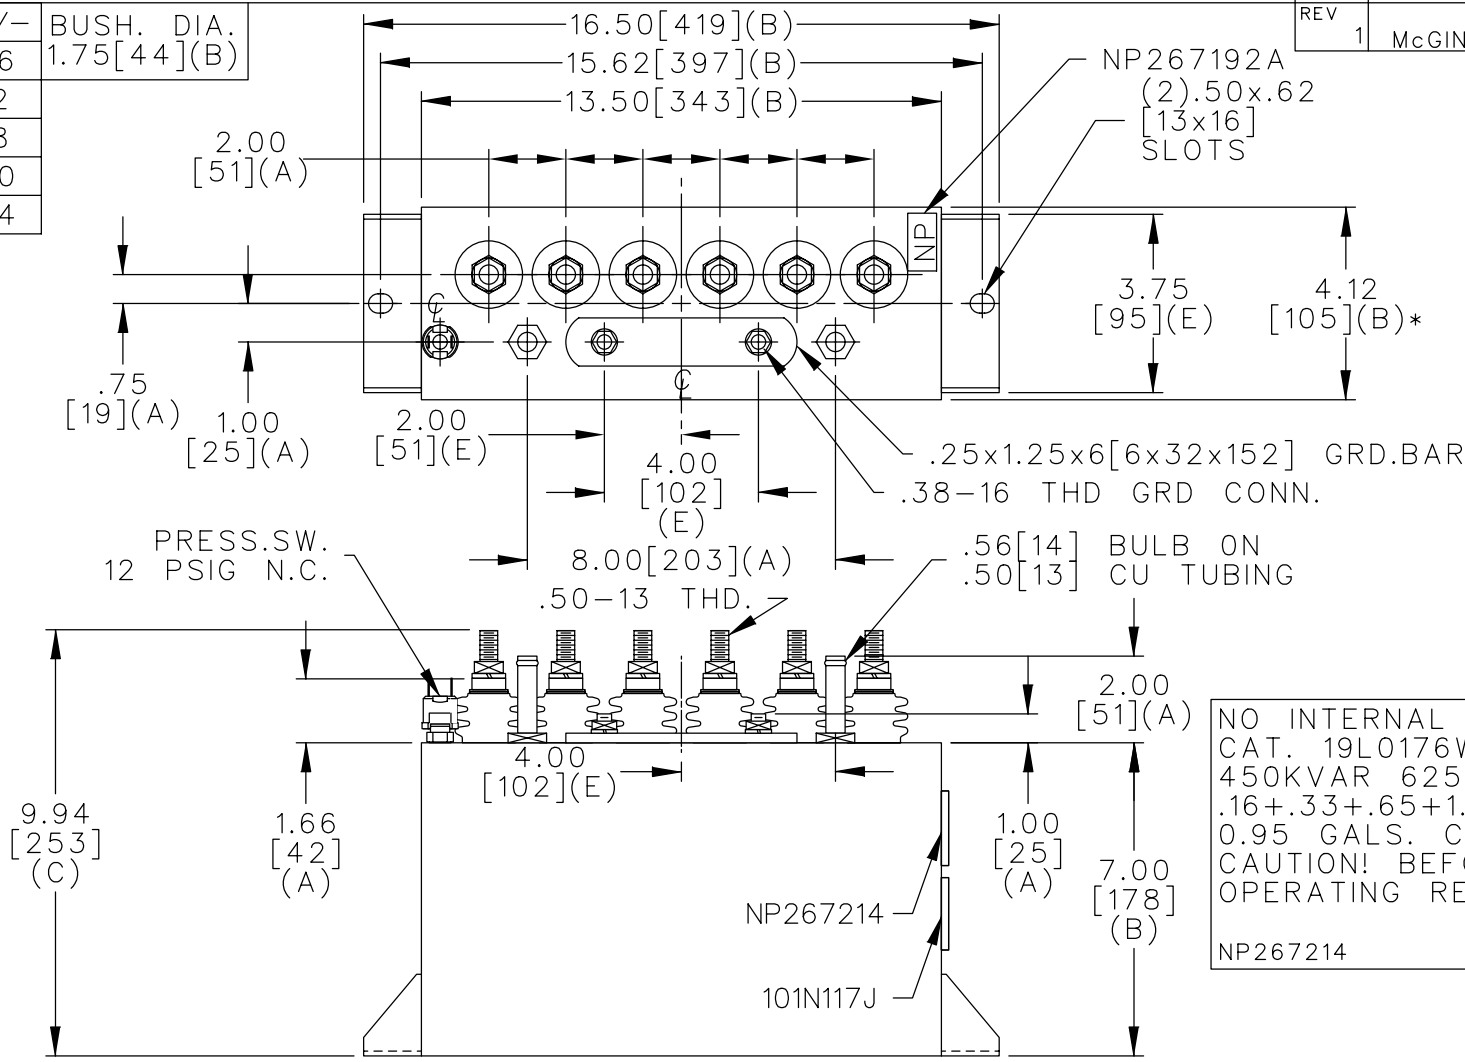

TERM	uF	kVAR
1	0.16	10
2	0.33	20
3	0.65	40
4	1.3	80
5	2.4	150
6	2.4	150

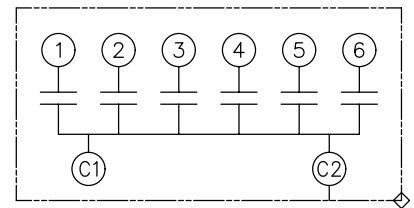

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0176WH1 SN  
 450KVAR 625V 25000HZ 1PH  
 .16+.33+.65+1.3+2x2.4 UF/TAP  
 0.95 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0176WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	NOV. 21, 1996			
ISSUED	12-4-96	DISTR TO	DATE	REV	DATE