



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

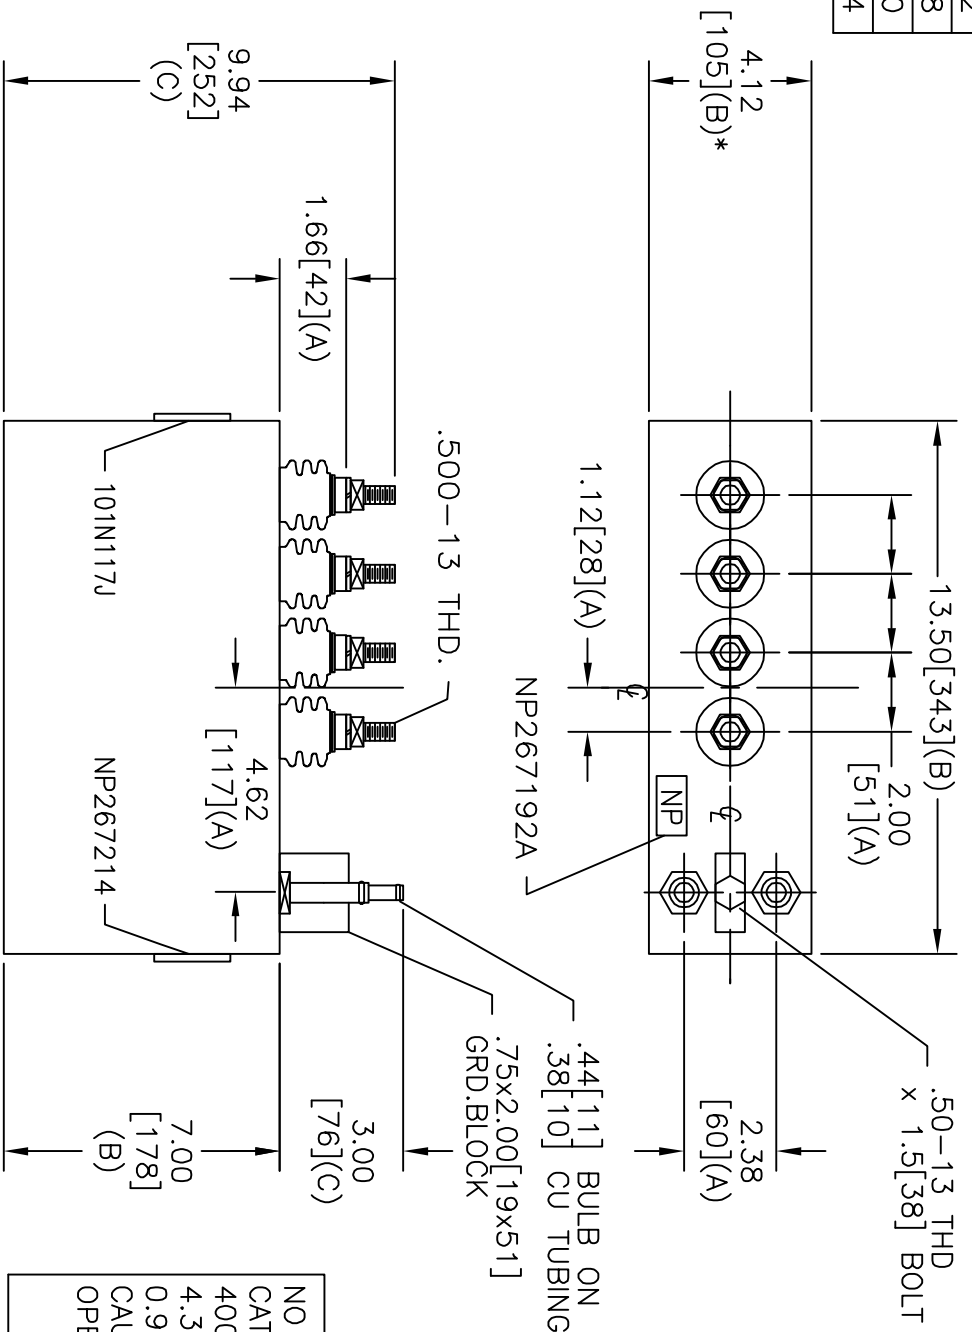

TERM	UF	KVAR
1	4.384	100
2	2.192	50
3	6.577	150
4	4.384	100

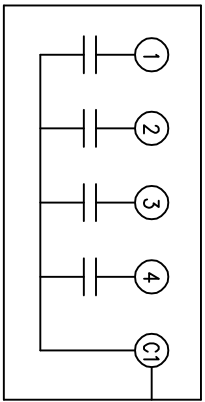

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0179WH1 SN  
 400KVAR 1100V 3000HZ 1PH  
 4.38-2.19-6.58-4.38 UF/TAP  
 0.9 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733

NP267214

SIZE	DWG NO	SHT	REV
A	19L0179WH1	2	1
REV	DESCRIPTION	DATE	APPROVED
1	UPDATE CAT NO	12/08/99	McGINN

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A



INDUSTRIAL SYSTEMS  
 FORT EDWARD, N.Y., U.S.A.

DRAWN E. McGinn

DATE MAY 27, 1998

ISSUED

DATE 5/27/98

SIZE A

SCALE

OUTLINE

19L0179WH1

SHEET 2 CONT ON