




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

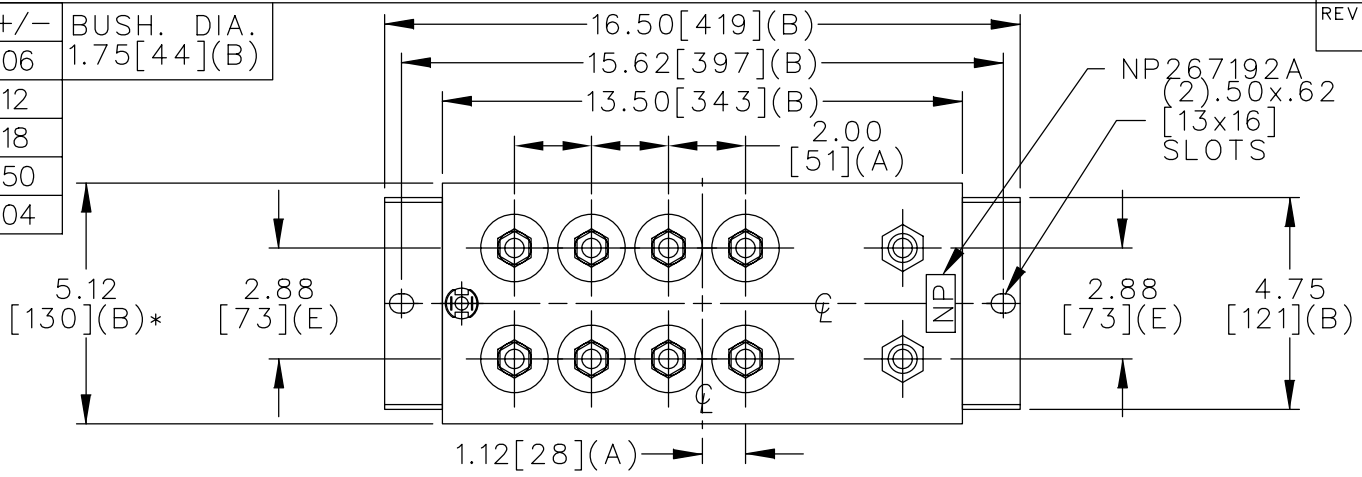

TERM	uF	kVAR
1	2	24.25
2	4	49.09
3	8	98.17
4	16	196.35
5	16	196.35
6	16	196.35
7	16	196.35
8	16	196.35

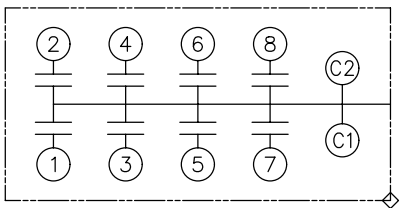

SCHMATIC DIAGRAM - 801

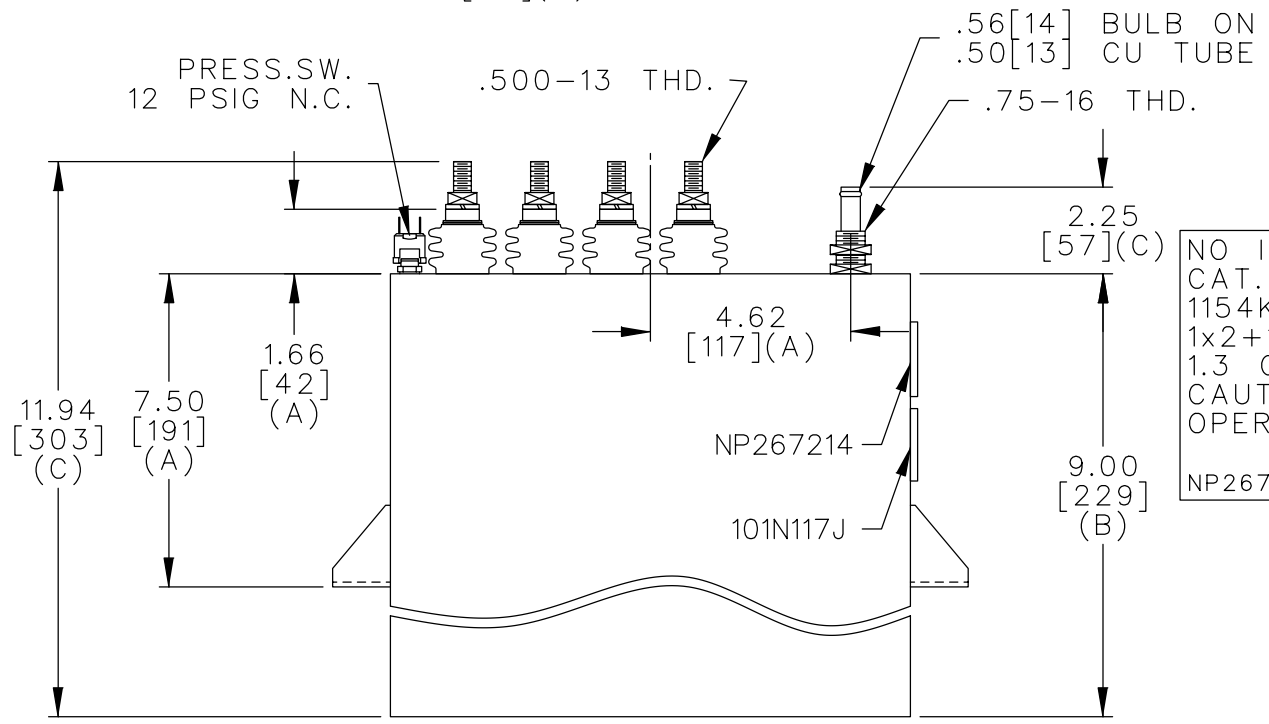

NO INTERNAL DISCH RESISTORS
 CAT. 19L0205WH4 SN
 1154KVAR 625V 5000HZ 1PH
 1x2+1x4+1x8+5x16 uF/TAP
 1.3 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1>OUTLINE</h1> <h2>19L0205WH4</h2>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	NOV. 4, 1996	SCALE		
ISSUED	11-6-96	DISTR TO			