



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

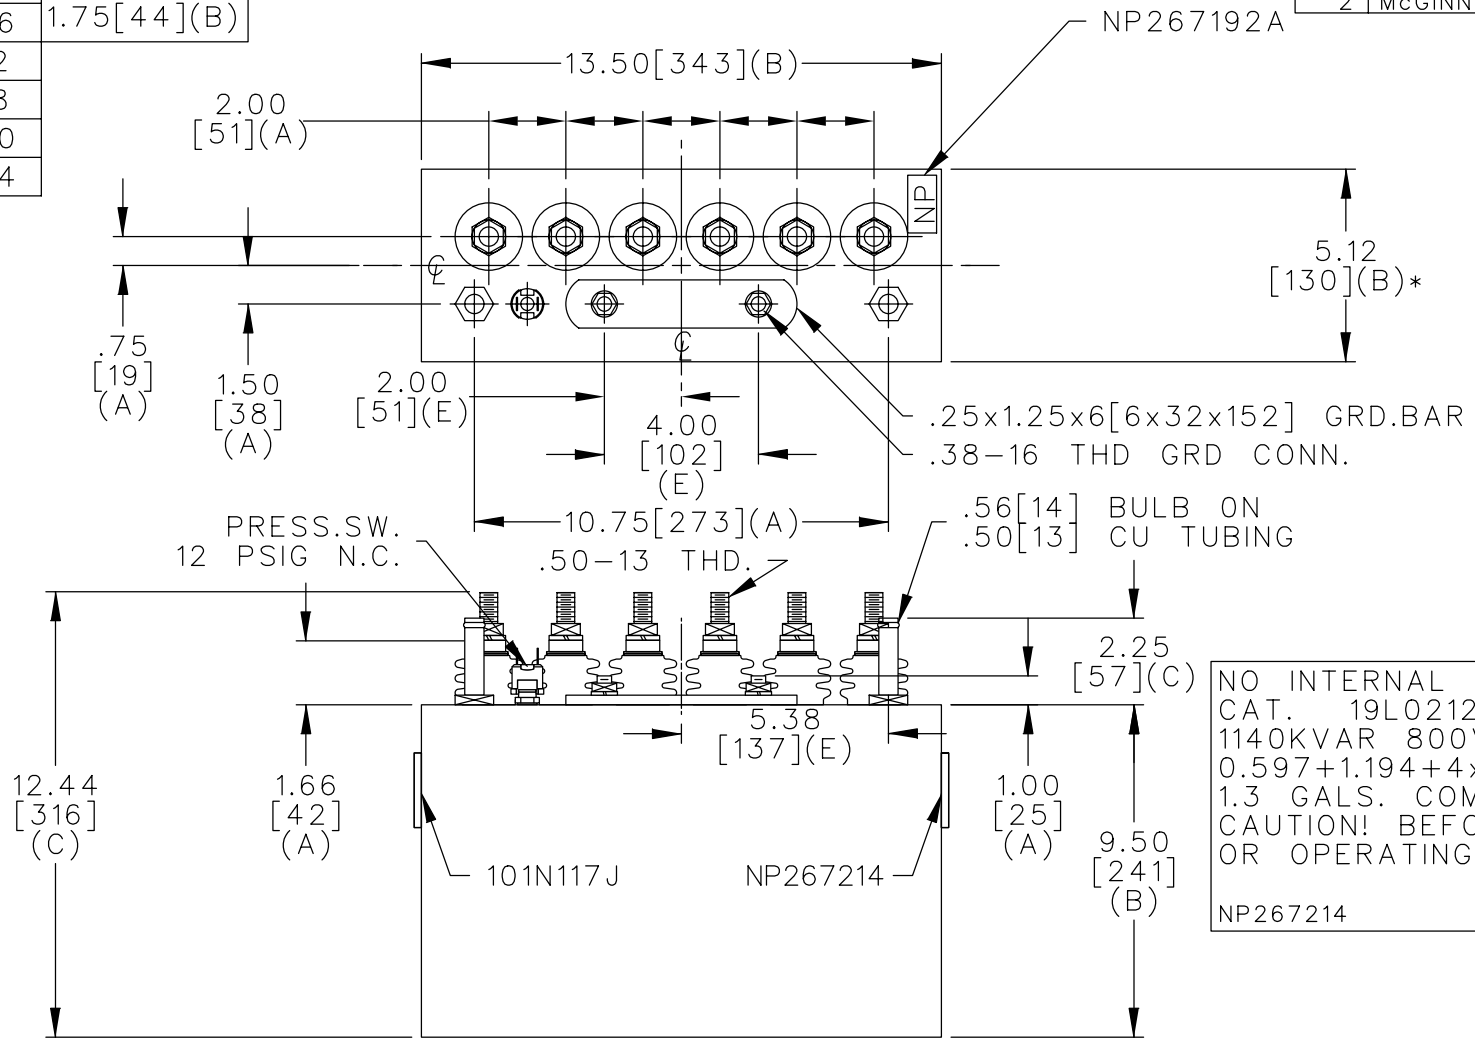

TERM	uF	kVAR
1	.597	60
2	1.194	120
3	2.387	240
4	2.387	240
5	2.387	240
6	2.387	240

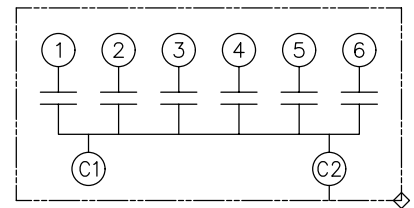

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0212WH2 SN
 1140KVAR 800V 25000HZ 1PH
 0.597+1.194+4x2.387 UF/TAP
 1.3 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0212WH2	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JAN. 23, 1997	SCALE		
ISSUED	1-30-97				