



19L0219WH

TOL	+/-	BUSH. DIA.
A	.06	1.75 [4.4] (B)
B	.12	
C	.18	
D	.50	
E	.04	

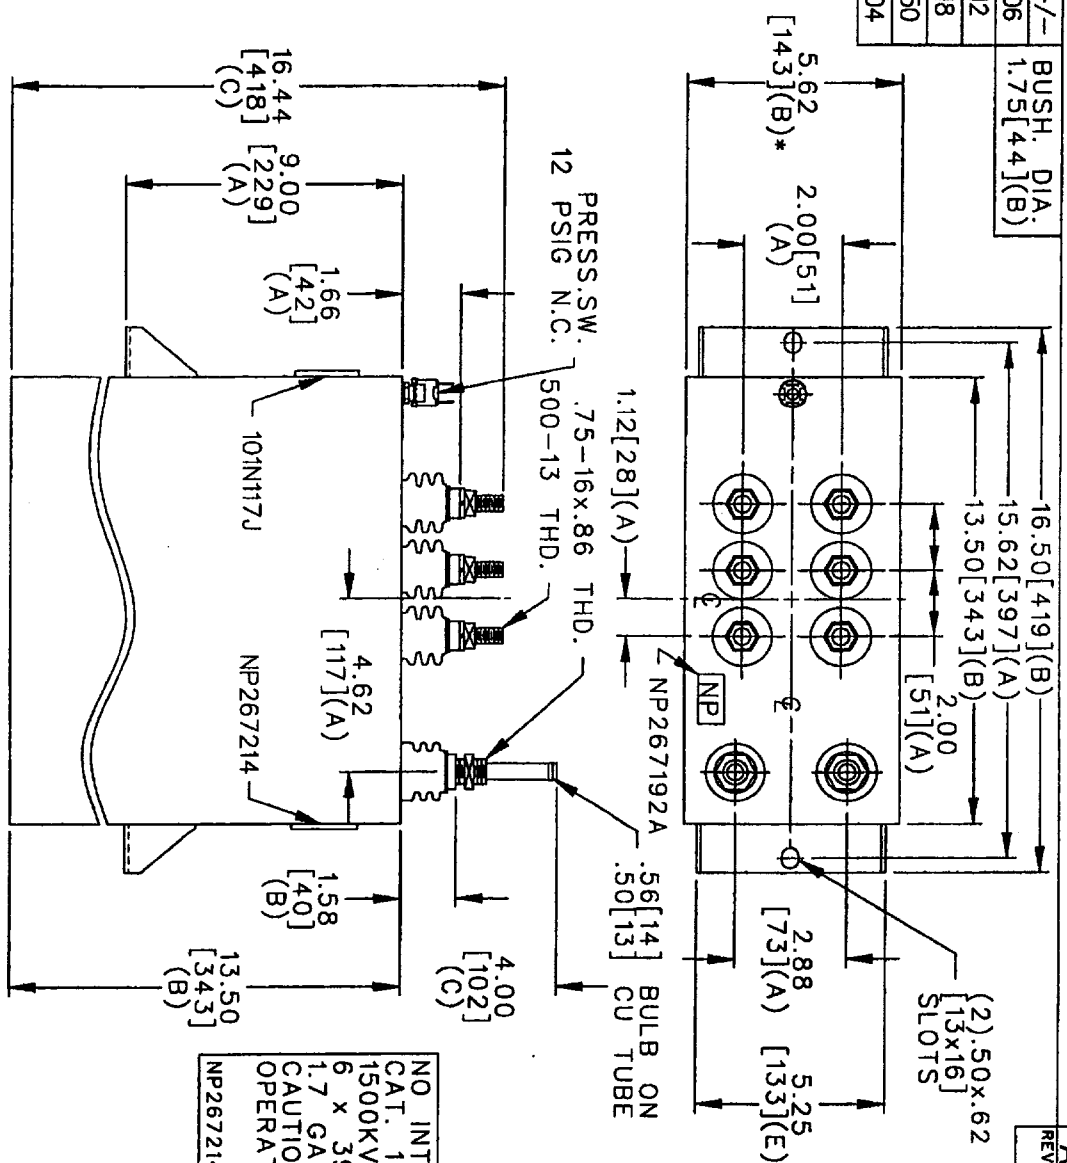

REV	DATE	SH	REV
A			

TERM	UF	KVAR
1	39.79	250
2	39.79	250
3	39.79	250
4	39.79	250
5	39.79	250
6	39.79	250



NO INTERNAL DISCH RESISTOR
 CAT. 19L0219WH4 SN
 1500KVAR 1000V 1000HZ 1PH
 6 x 39.79 UF/TAP
 1.7 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [1.3]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS
 87192A

		CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	
DRAWN E. MCGINN ISSUED 2.1.00	JAN. 28, 2000	SIZE A	SCALE
DISTR TO		OUTLINE 19L0219WH4	
SHEET 2		DATE	