




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

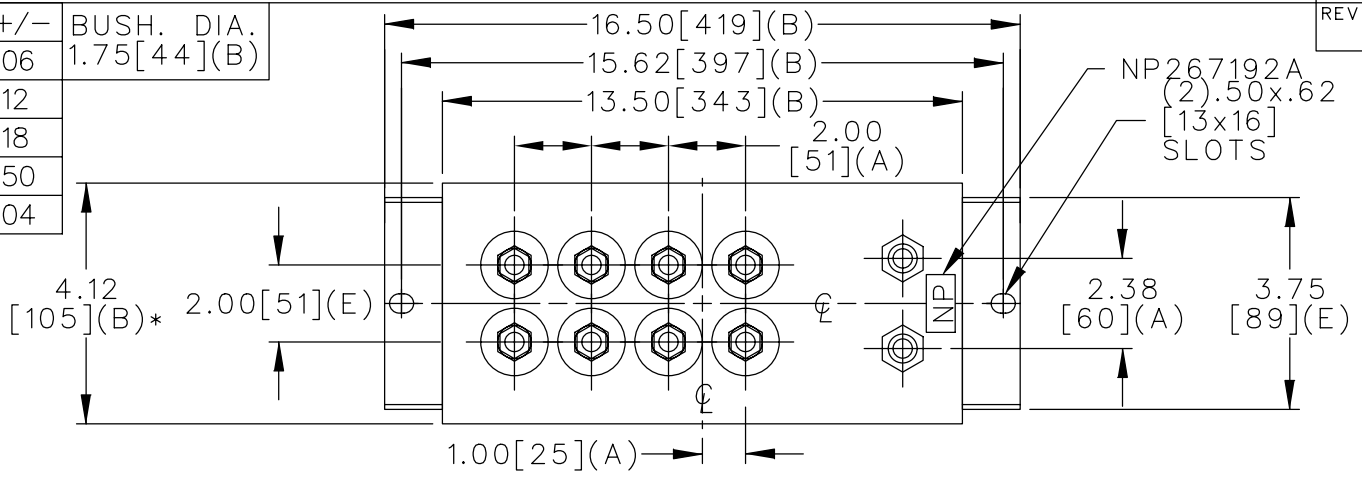

TERM	uF	kVAR
1	5	49.3
2	5	49.3
3	5	49.3
4	5	49.3
5	5	49.3
6	2.5	24.7
7	1.2	11.8
8	.6	5.9

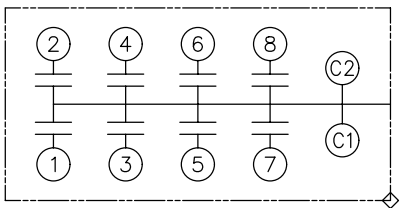

SCHEMATIC DIAGRAM - 801

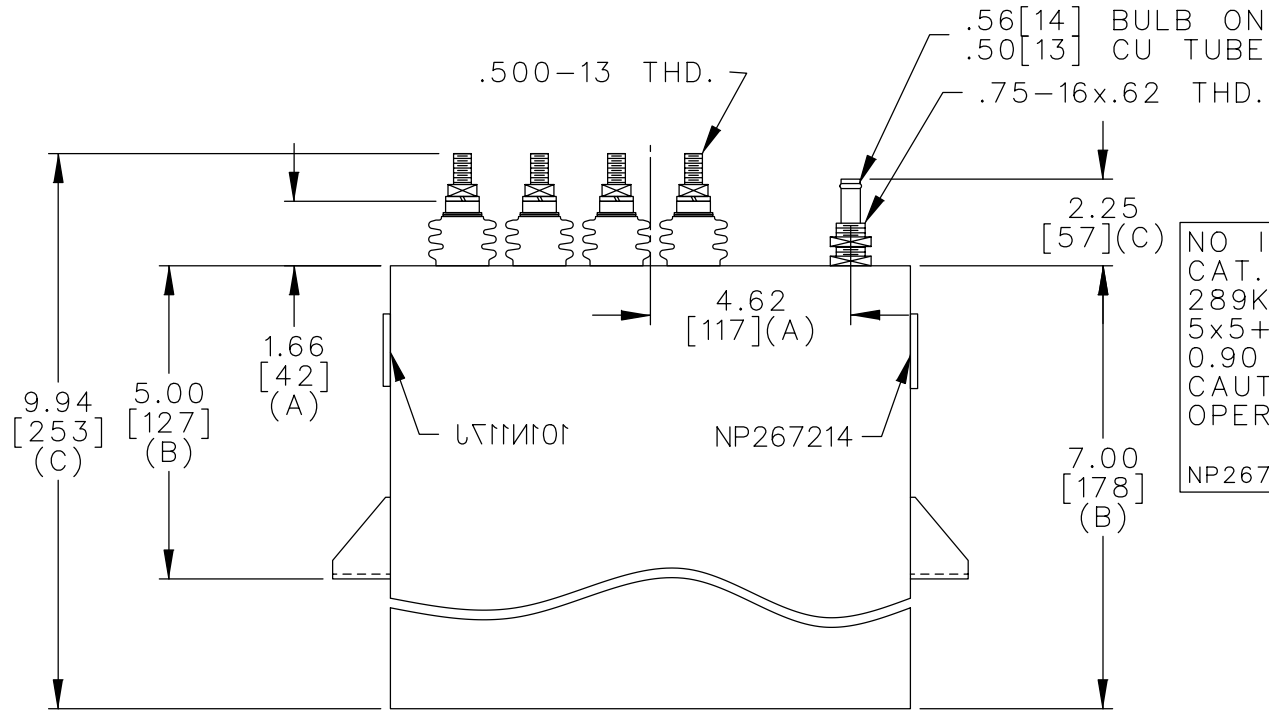

NO INTERNAL DISCH RESISTORS
 CAT. 19L0266WH3 SN
 289KVAR 280V 20KHZ 1PH
 5x5+2.5+1.2+.6 UF/TAP
 0.90 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0266WH3	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JUNE 19, 1998	SCALE		
ISSUED					