



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

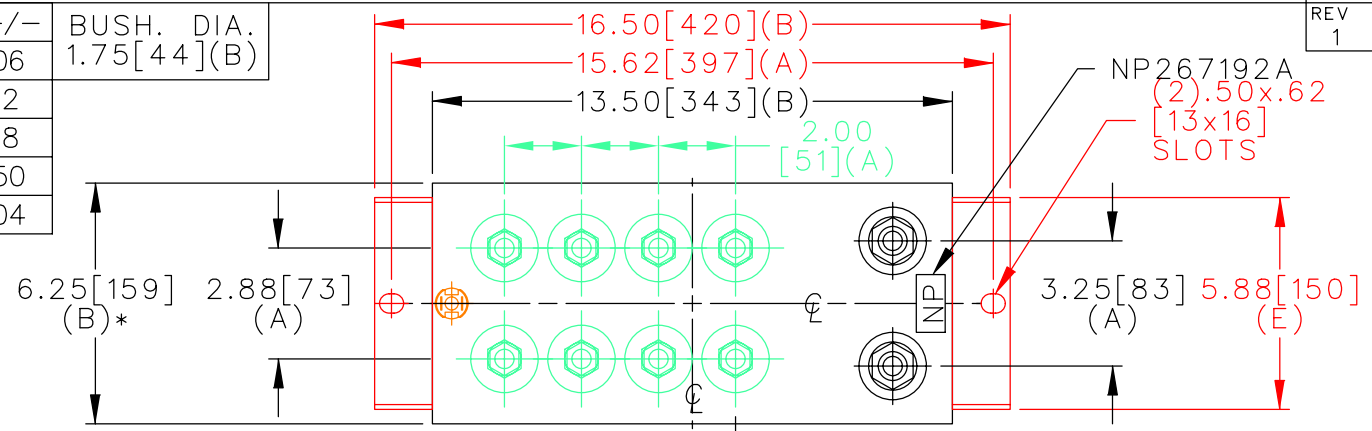


TERM	uF	kVAR
1	38.2	375
2	38.2	375
3	38.2	375
4	38.2	375
5	38.2	375
6	38.2	375
7	38.2	375
8	38.2	375

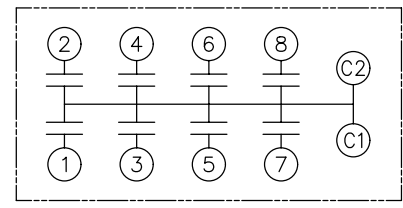

SCHEMATIC DIAGRAM - 800

PRESS.SW.
12 PSIG N.C.

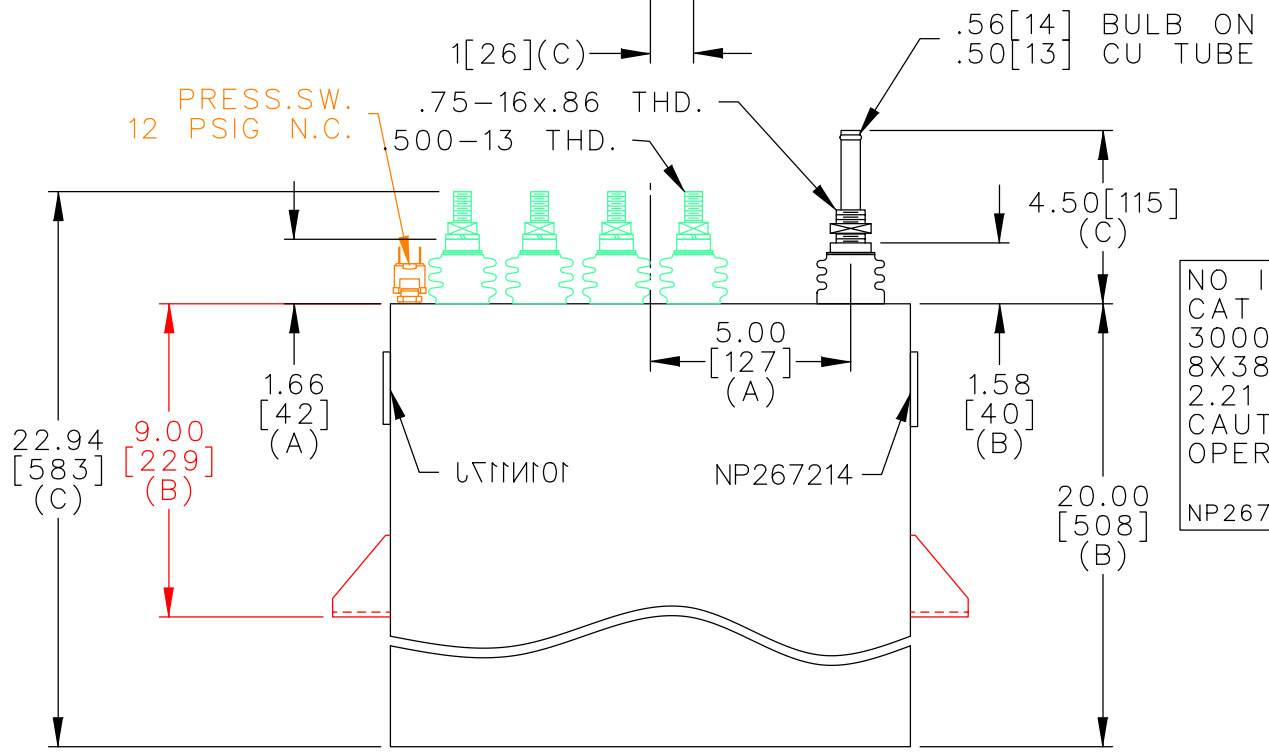

NO INTERNAL DISCH RESISTORS
 CAT 19L0288WH4 SN
 3000KVAR 1250V 1000HZ 1PH
 8X38.20 UF/TAP
 2.21 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 102 / 46 LB/KG	OUTLINE 19L0288WH4	SHEET 2 CONT. 3 ON ON
	DRAWN 01/23/97	LRD 01/23/97	SCALE WC7	version		
ISSUED						

DISTR TO