



19L0306W

TOL	+/-	BUSH. DIA.
A	.06	1.75 [4.4] (B)
B	.12	
C	.18	
D	.50	
E	.04	

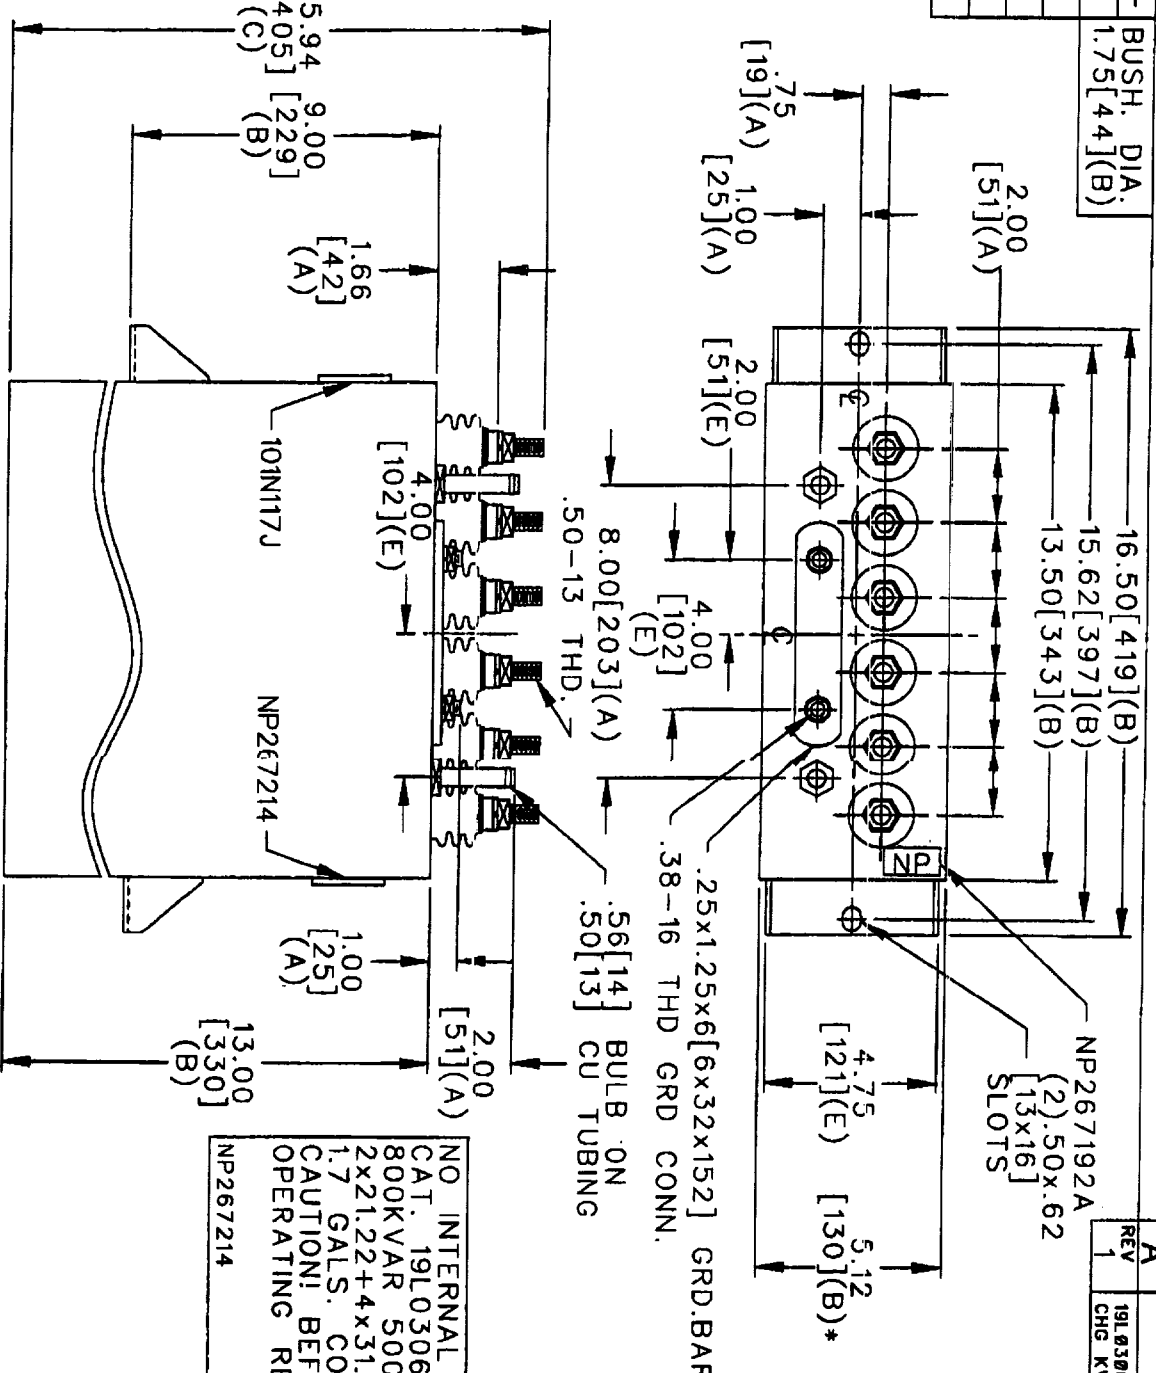

TERM	UF	KVAR
1	21.22	100
2	21.22	100
3	21.22	150
4	21.22	150
5	21.22	150
6	21.22	150

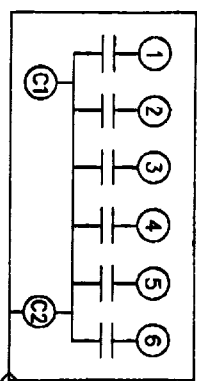

NO INTERNAL DISCH RESISTORS
 CAT. 19L0306WH3 SN
 800KVAR 500V 3000HZ 1PH
 2x21.22+4x31.83 UF/TAP
 1.7 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS
 NP267192A

		CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	
DRAWN E. MCGINN ISSUED 11-11-98	NOV. 11, 1998	SIZE A	SCALE
<h1>OUTLINE</h1> <h2>19L0306WH3</h2>		SHEET 2	CONT. ON

SIZE	DWG NO.	SH	REV
A	19L0306WH3		1
REV	19L0306WH3 WAS 91L06WH3, 9/31/90		
1	CHG KVAR ON TERMS 3-6		