



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

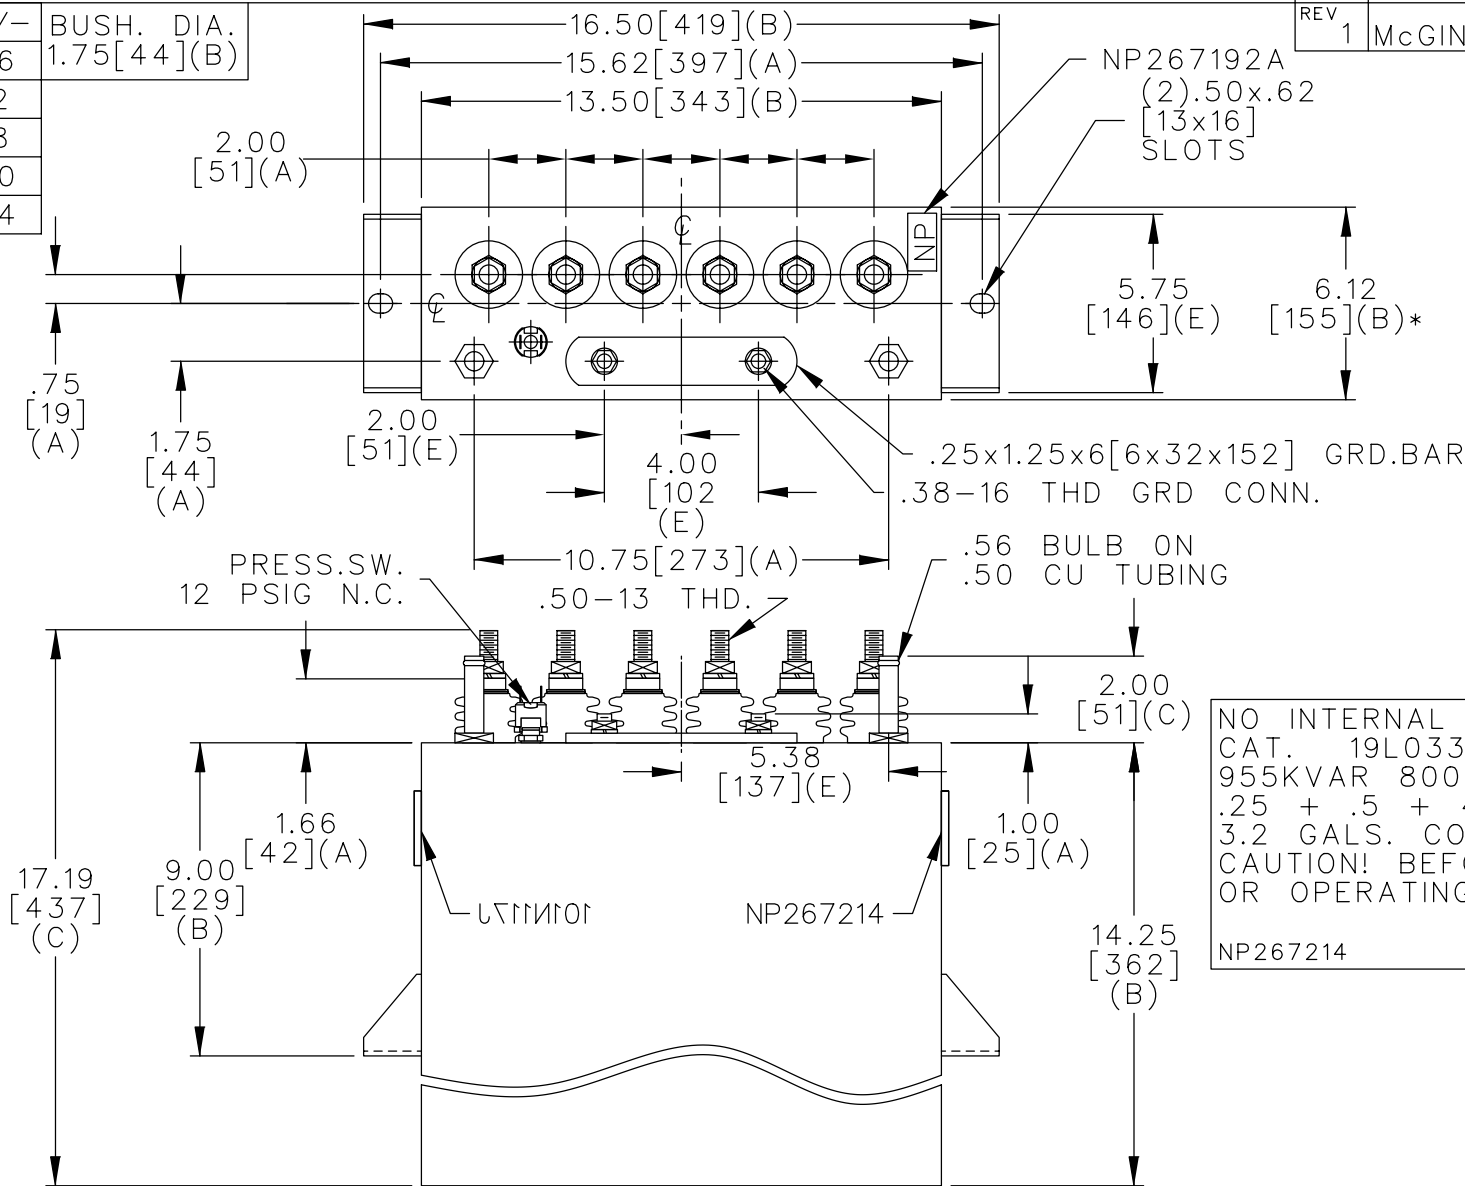

TERM	uF	kVAR
1	.25	50.2
2	.50	100.5
3	1.00	201
4	1.00	201
5	1.00	201
6	1.00	201

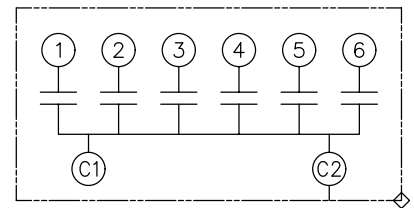

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0330WH4 SN
 955KVAR 800V 50000HZ 1PH
 .25 + .5 + 4X 1.0 UF/TAP
 3.2 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0330WH4	
	DRAWN E.McGINN	SEPT. 23, 1999	SCALE		
ISSUED	9-29-99	SHEET 2	CONT. ON -	DISTR TO	