




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

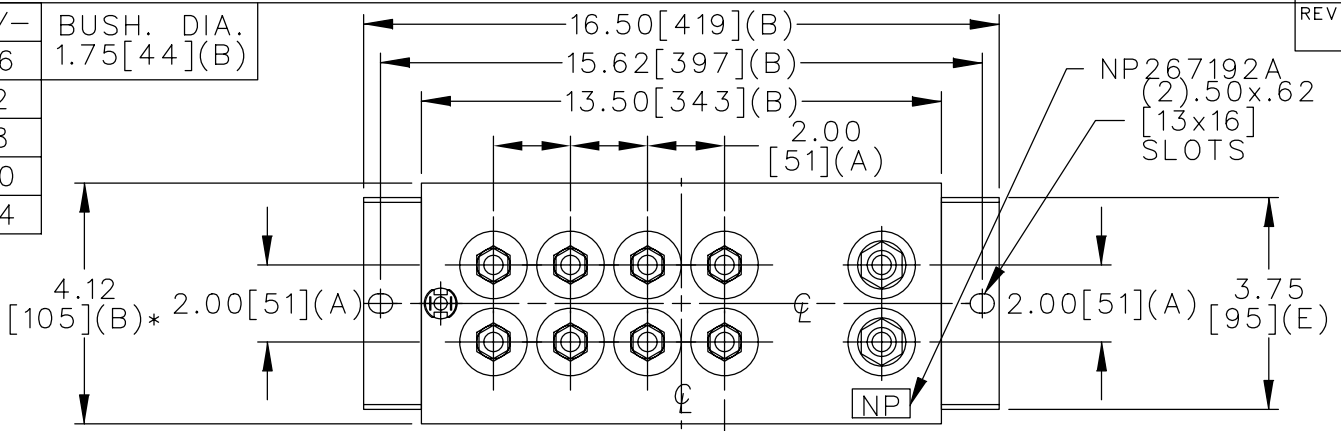

TERM	uF	kVAR
1	14.47	330
2	14.47	330
3	14.47	330
4	14.47	330
5	14.47	330
6	14.47	330
7	14.47	330
8	14.47	330

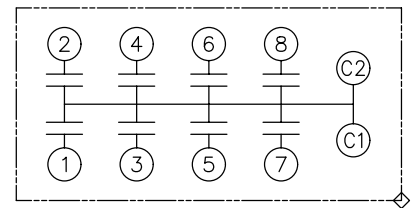

SCHEMATIC DIAGRAM - 800

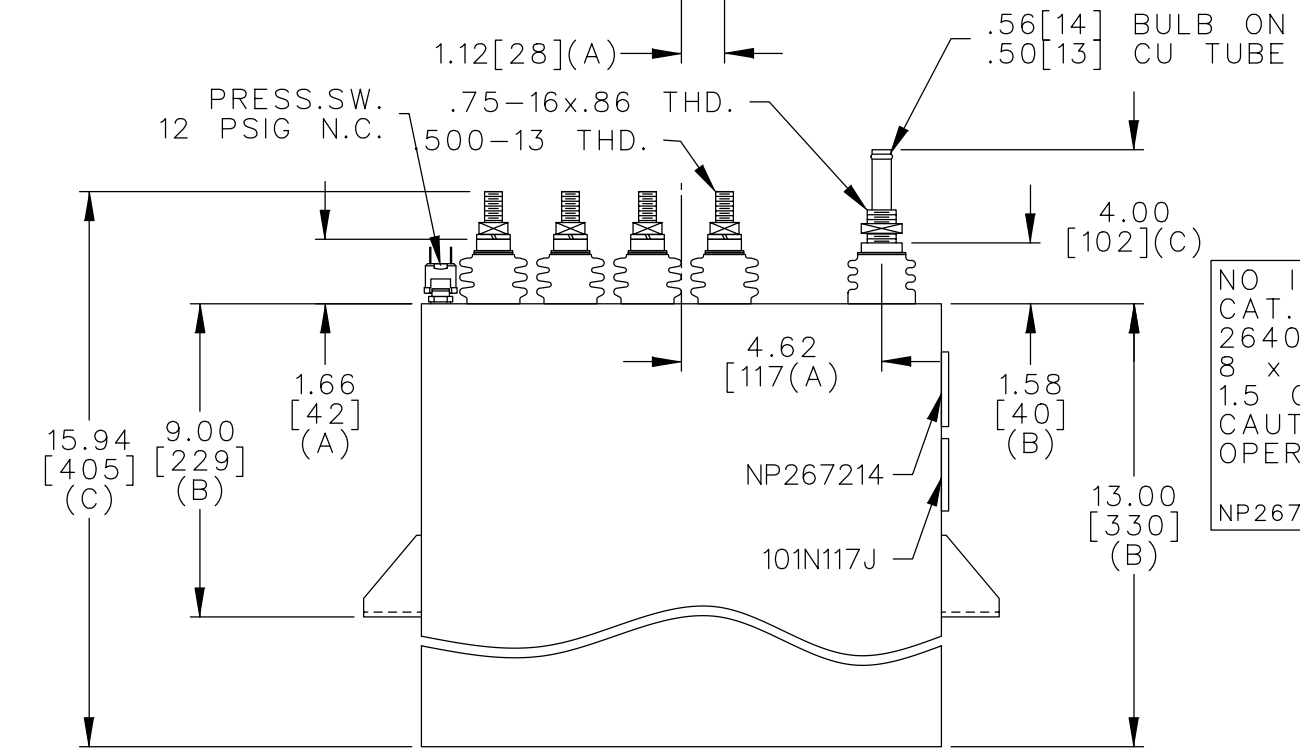

NO INTERNAL DISCH RESISTORS
 CAT. 19L0331WH4 SN
 2640KVAR 1100V 3000HZ 1PH
 8 x 14.47 UF/TAP
 1.5 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0331WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JAN. 21, 1997	SCALE		
ISSUED	1-22-97	DISTR TO			