



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

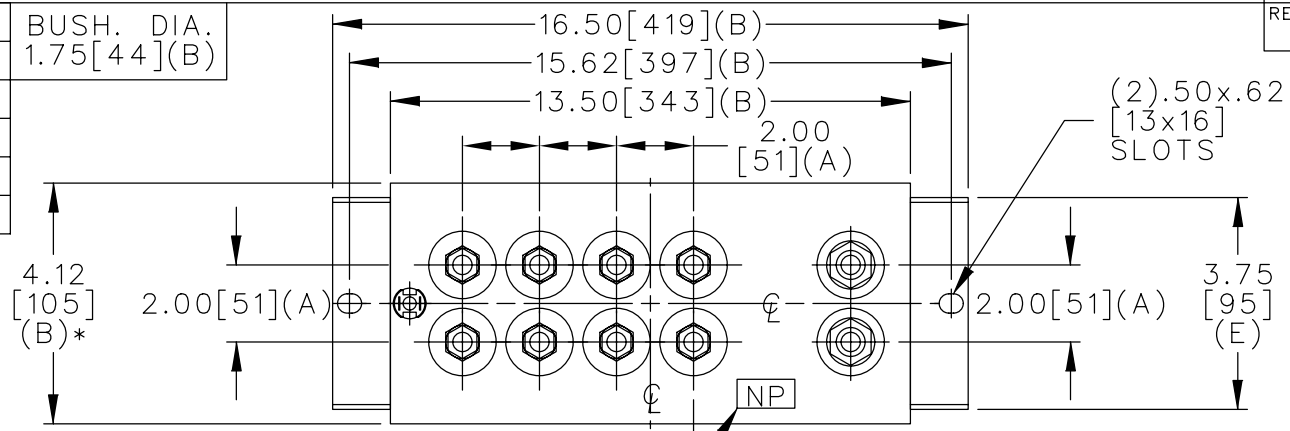


TERM	uF	kVAR
1	1.437	487.5
2	1.437	487.5
3	1.437	487.5
4	1.437	487.5
5	1.437	487.5
6	1.437	487.5
7	1.437	487.5
8	1.437	487.5

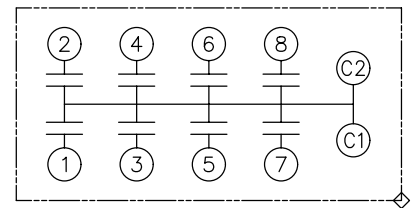

PRESS.SW.  
12 PSIG N.C.

.DHT 81-27.  
500-13 THD.

NP267192A .56[14] BULB ON  
.50[13] CU TUBE

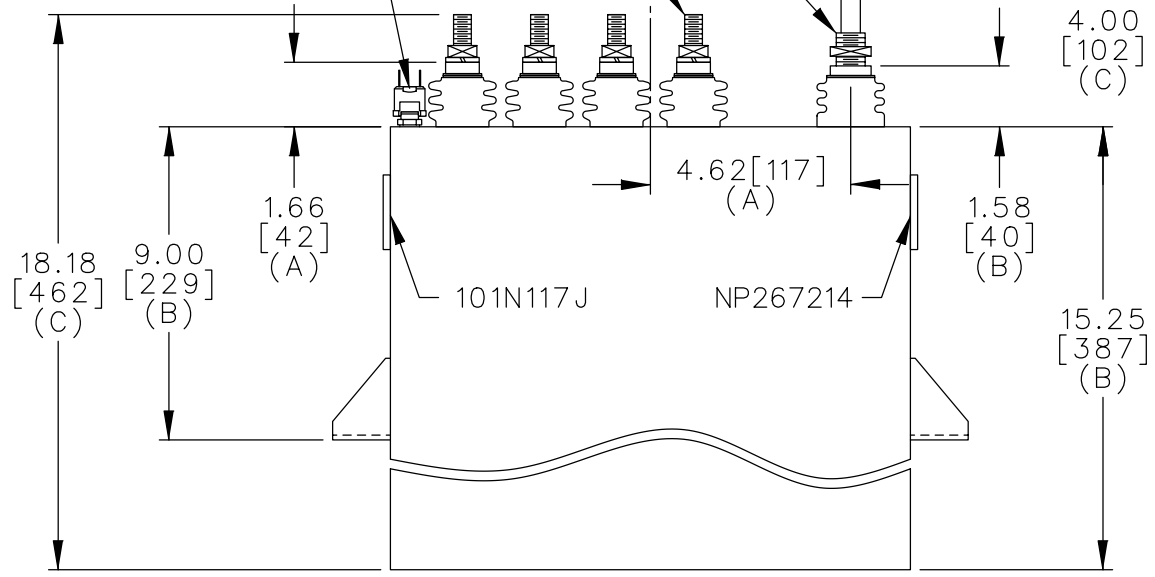

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0363WH4 SN  
 3900KVAR 3000V 6000HZ  
 8 x 1.44 UF/TAP  
 1.76 GALS COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0363WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	DEC. 6, 1996	SCALE		
ISSUED	12-11-96	DISTR TO			