




TOL	+/-	BUSH. DIA.
A	.06	1.75(B)
B	.12	
C	.18	
D	.50	
E	.04	

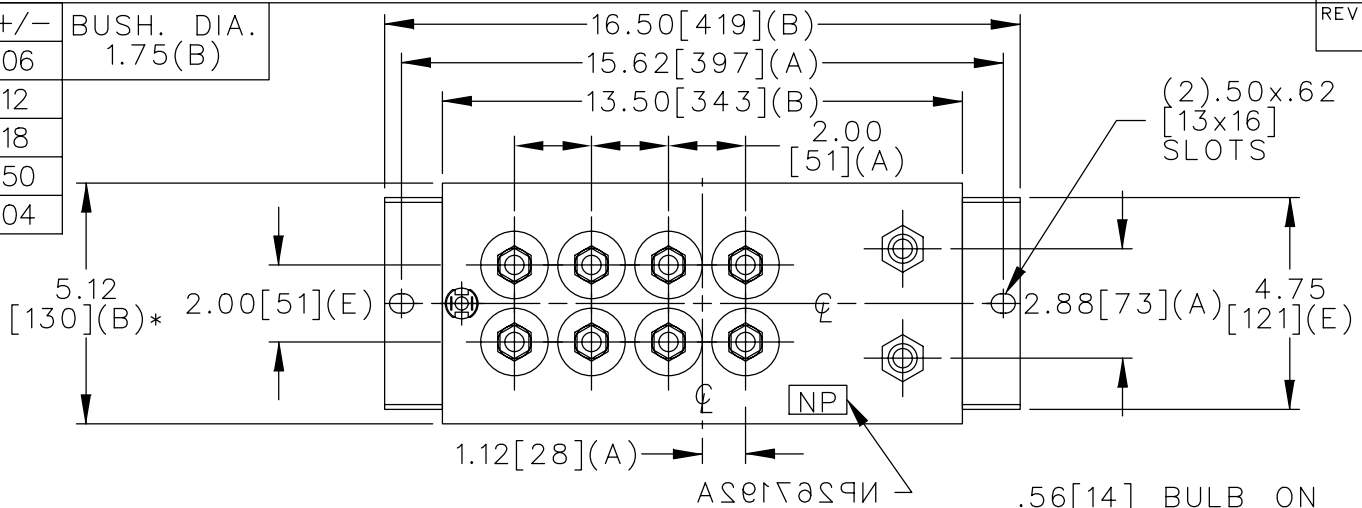

TERM	uF	kVAR
1	3.32	250
2	3.32	250
3	3.32	250
4	3.32	250
5	6.63	500
6	6.63	500
7	6.63	500
8	6.63	500

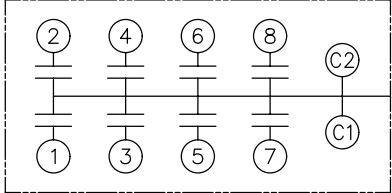

SCHEMATIC DIAGRAM - 801

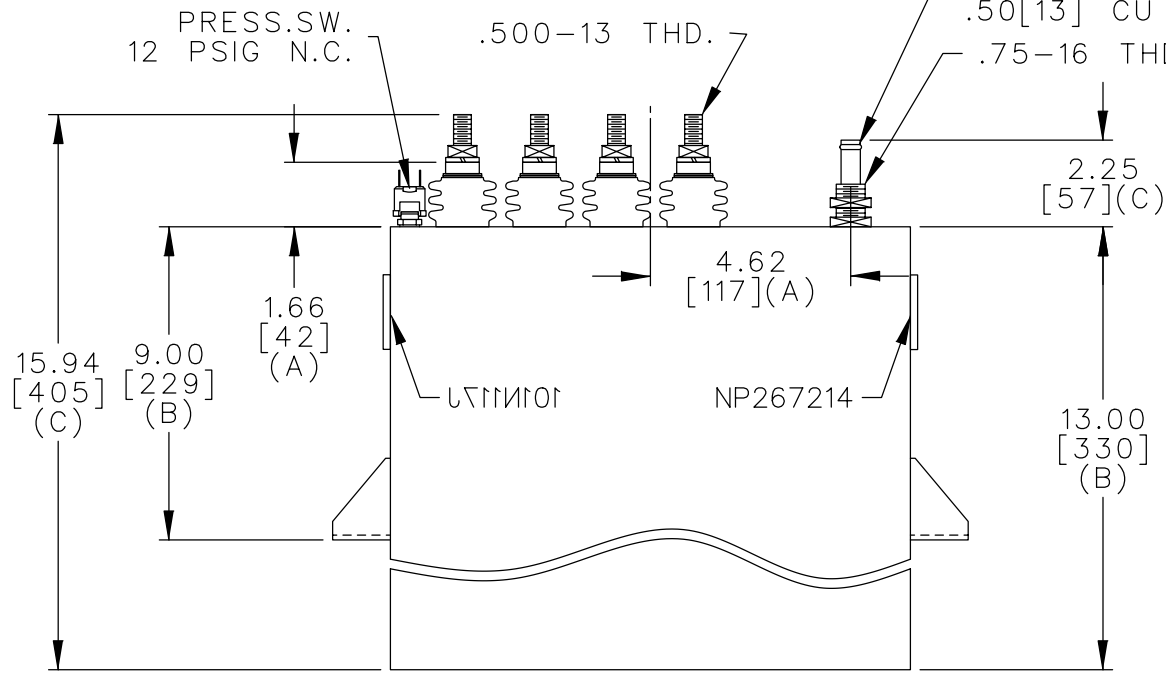

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0374WH4 SN  
 3000KVAR 2000V 3000HZ 1PH  
 4x3.32+4x6.63 UF/TAP  
 1.74 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0374WH4	
	DRAWN E.McGINN	MAR. 27, 2001	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO