



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

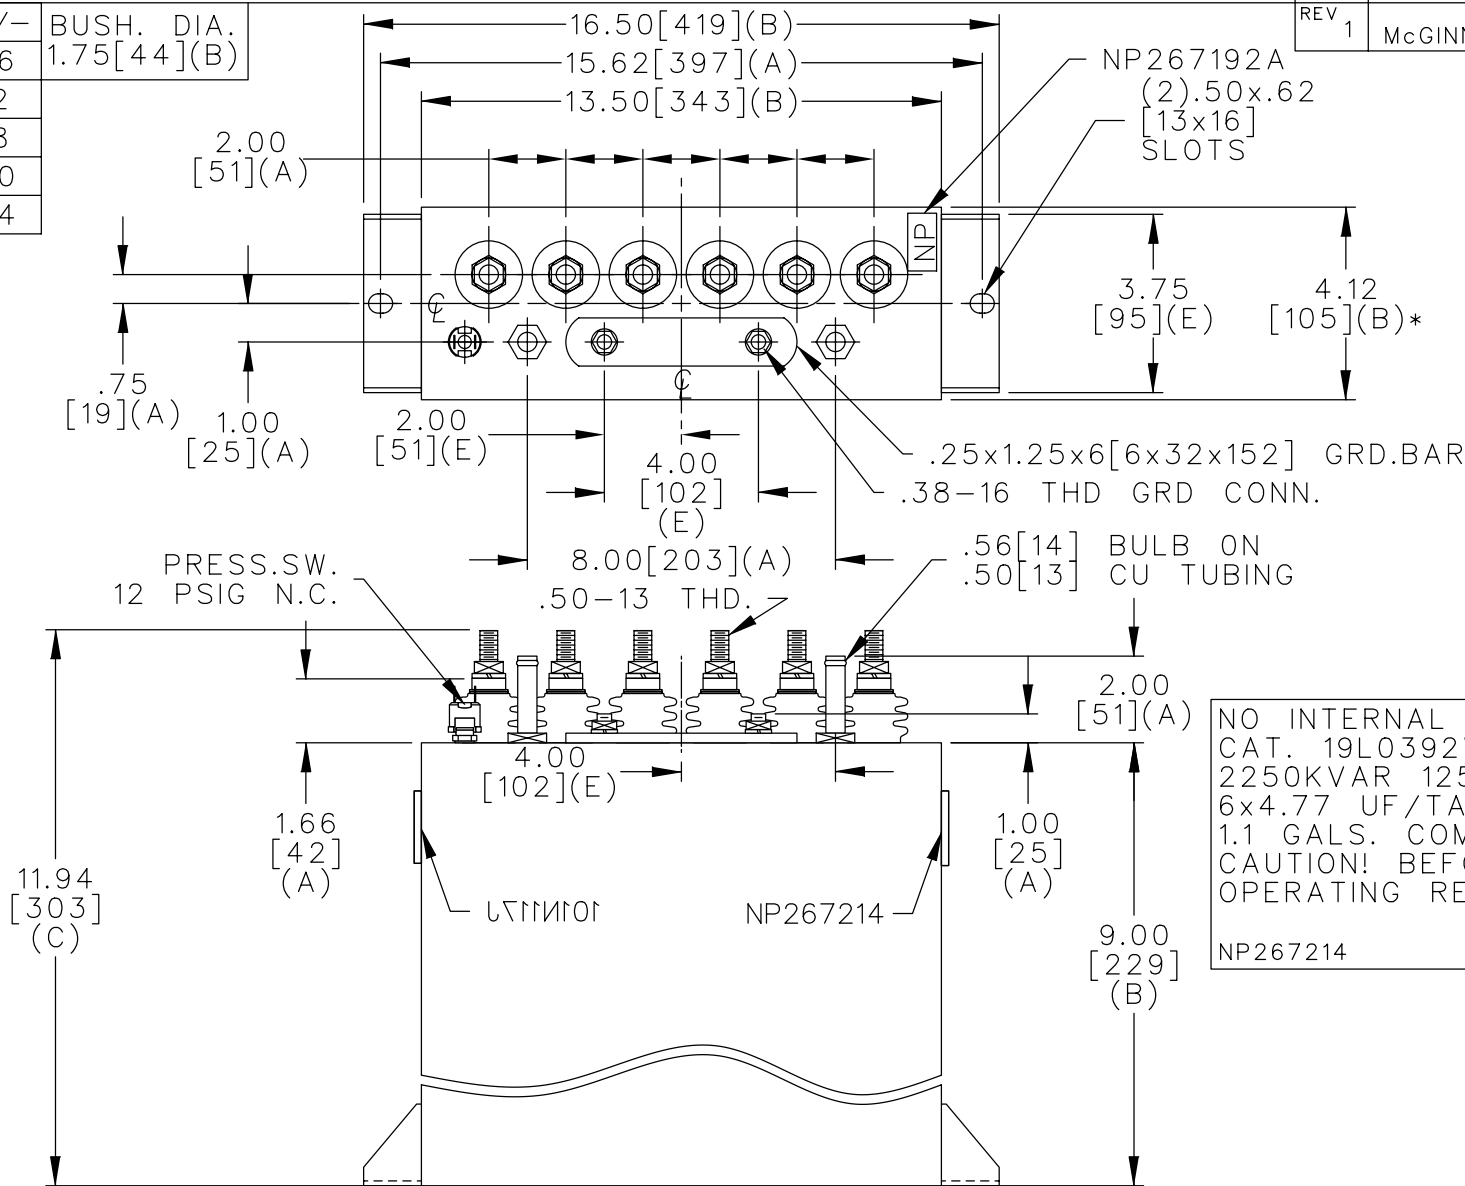

TERM	uF	kVAR
1	4.77	375
2	4.77	375
3	4.77	375
4	4.77	375
5	4.77	375
6	4.77	375

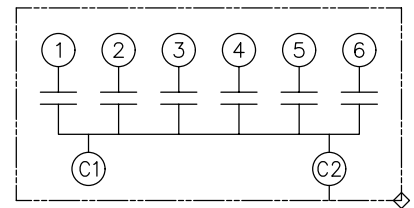

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0392WH4 SN
 2250KVAR 1250V 8000HZ 1PH
 6x4.77 UF/TAP
 1.1 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0392WH4	
	DRAWN E.MCGINN	FEB. 13, 1997	SCALE		
ISSUED	2-19-97		SHEET 2	CONT. ON -	DISTR TO