



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

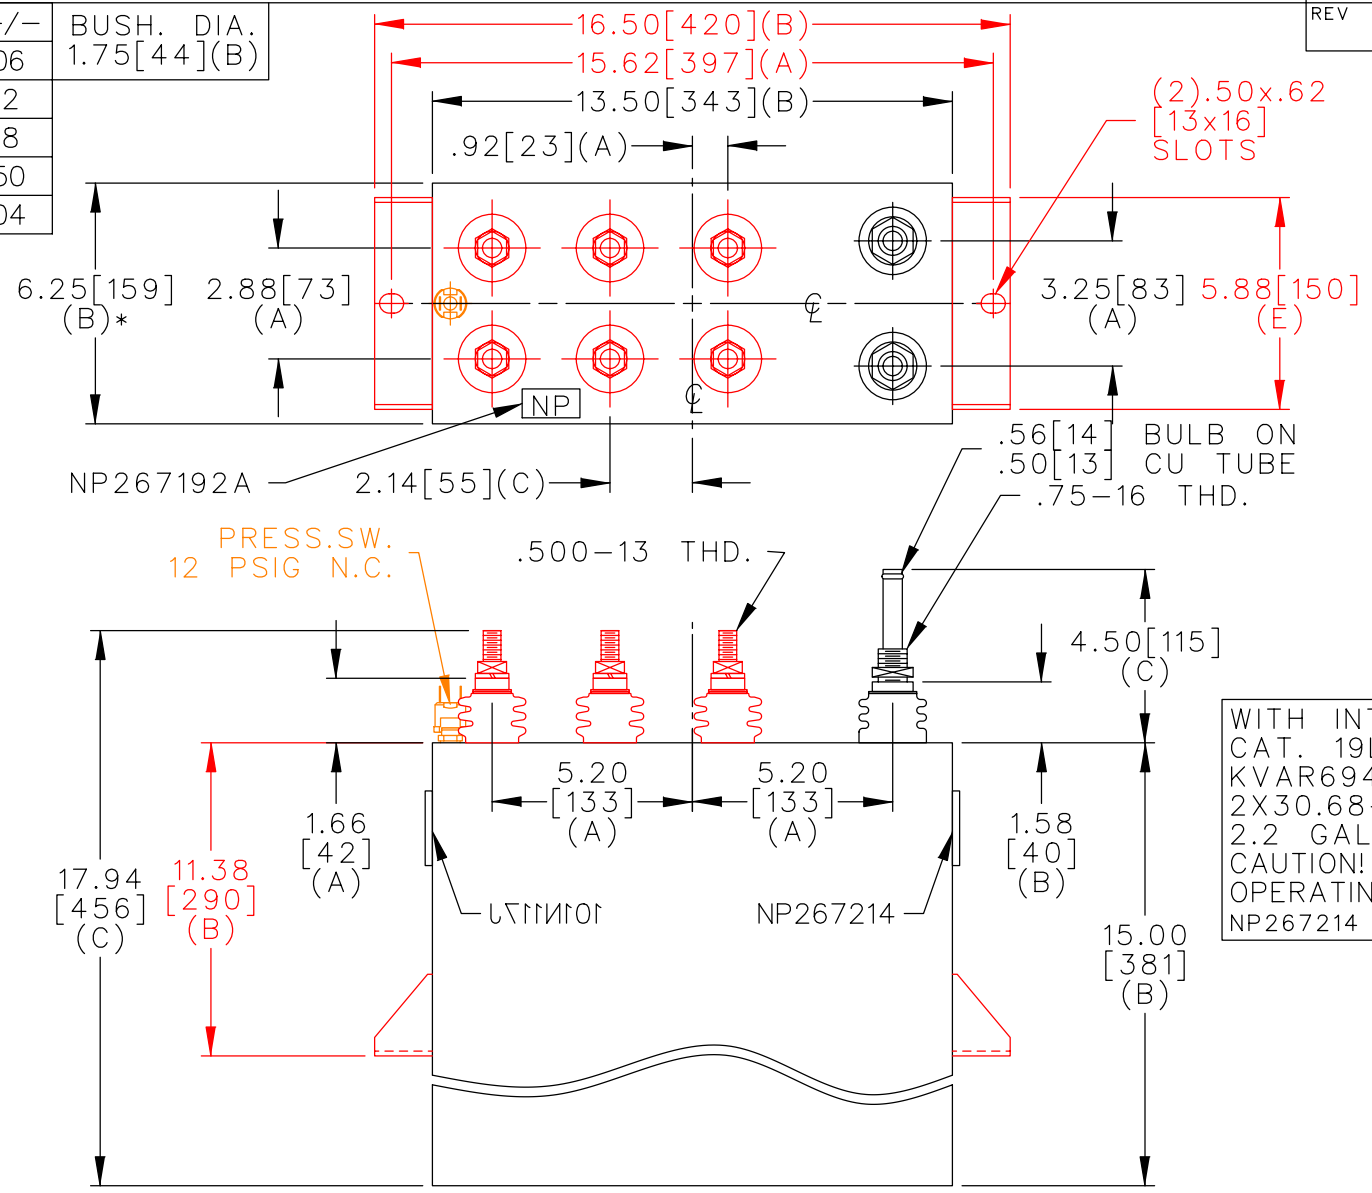

TERM	uF	KVAR
1	30.68	57.8
2	30.68	57.8
3	61.36	115.7
4	61.36	115.7
5	92.04	173.5
6	92.04	173.5

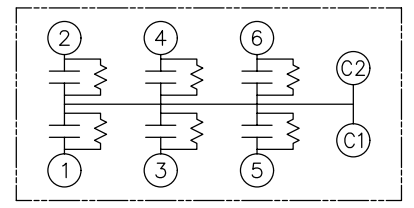

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0408WH4 SN
 KVAR694 VOLTS1000 HZ300 PH1
 2X30.68+2X61.36+2X92.04UF/TAP
 2.2 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 66 / 30 LB/KG	OUTLINE 19L0408WH4	SHEET 2 CONT. 3
	DRAWN E.McGINN	JULY 1, 1999	SCALE	DISTR TO		