



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

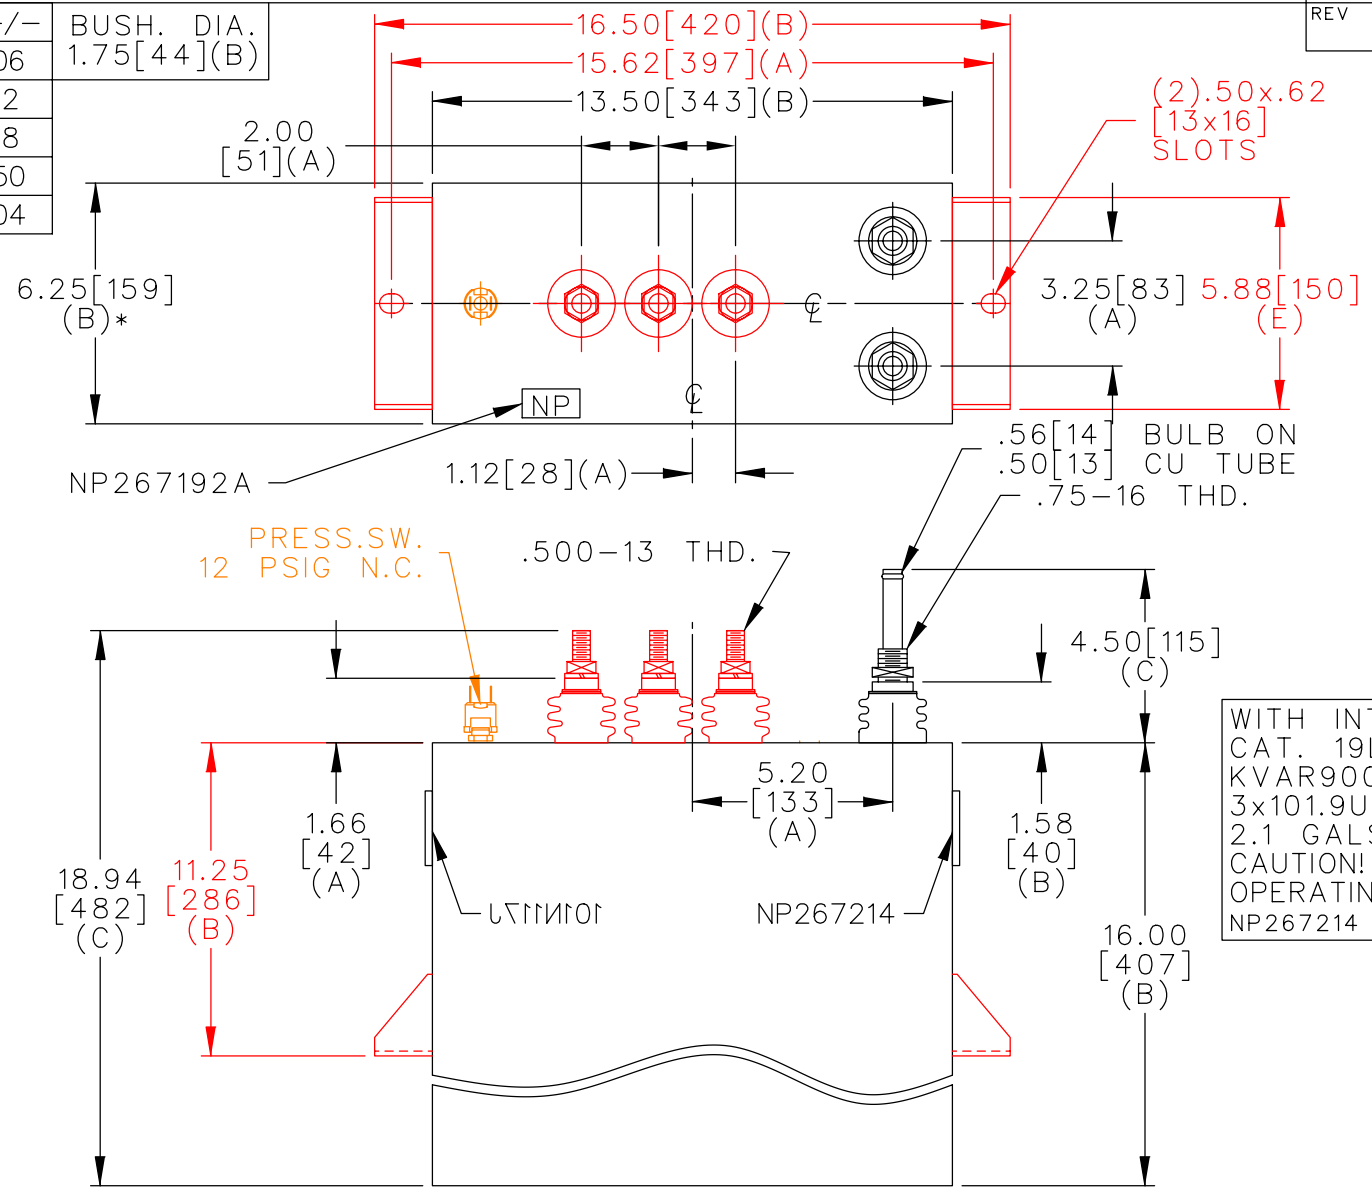

TERM	uF	KVAR
1	101.9	300
2	101.9	300
3	101.9	300

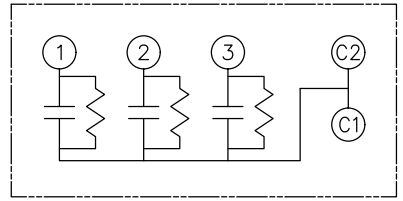

SCHEMATIC DIAGRAM - 327

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0434WH4 SN
 KVAR900 VOLTS1250 HZ300 PH1
 3x101.9UF/TAP
 2.1 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 69 / 31 LB/KG	OUTLINE 19L0434WH4	SHEET 2 CONT. 3 ON ON
	DRAWN E.McGINN	JULY 2, 1999	SCALE	DISTR TO		