



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

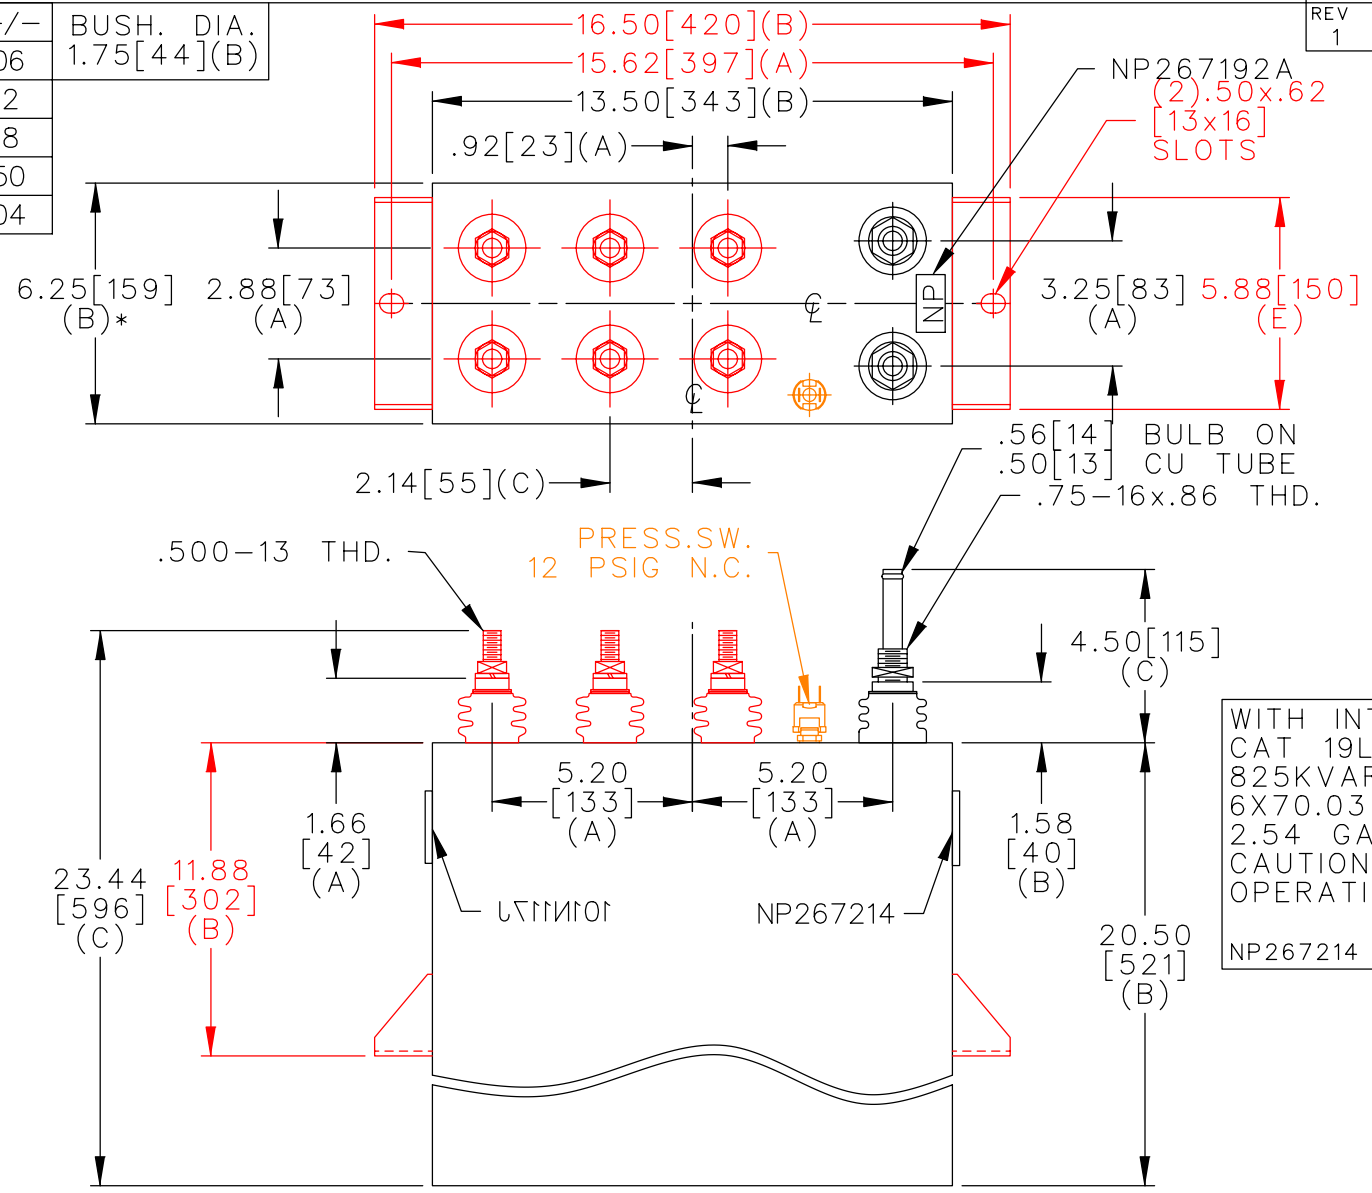

TERM	uF	kVAR
1	70.03	137.5
2	70.03	137.5
3	70.03	137.5
4	70.03	137.5
5	70.03	137.5
6	70.03	137.5

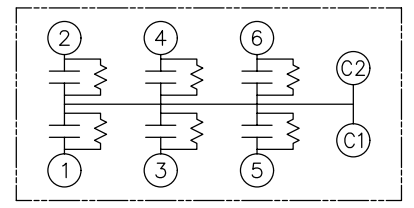

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT 19L0461WH4 SN
 825KVAR 1250V 200HZ 1PH
 6X70.03 UF/TAP
 2.54 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 86 / 39 LB/KG	OUTLINE 19L0461WH4	SHEET 2 CONT. 3 ON ON
	DRAWN 11/25/96	LRD 11/25/96	SCALE WC6	version		
ISSUED						

DISTR TO