



| | |
|-----|-----|
| TOL | +/- |
| A | .06 |
| B | .12 |
| C | .18 |
| D | .25 |
| E | .03 |

| | | | |
|------|----------------------|----|-----|
| SIZE | DWG NO. | SH | REV |
| A | 19L0485WH3 | 2 | |
| REV | McGINN CHG UF IN TAB | | |
| 2 | | | |

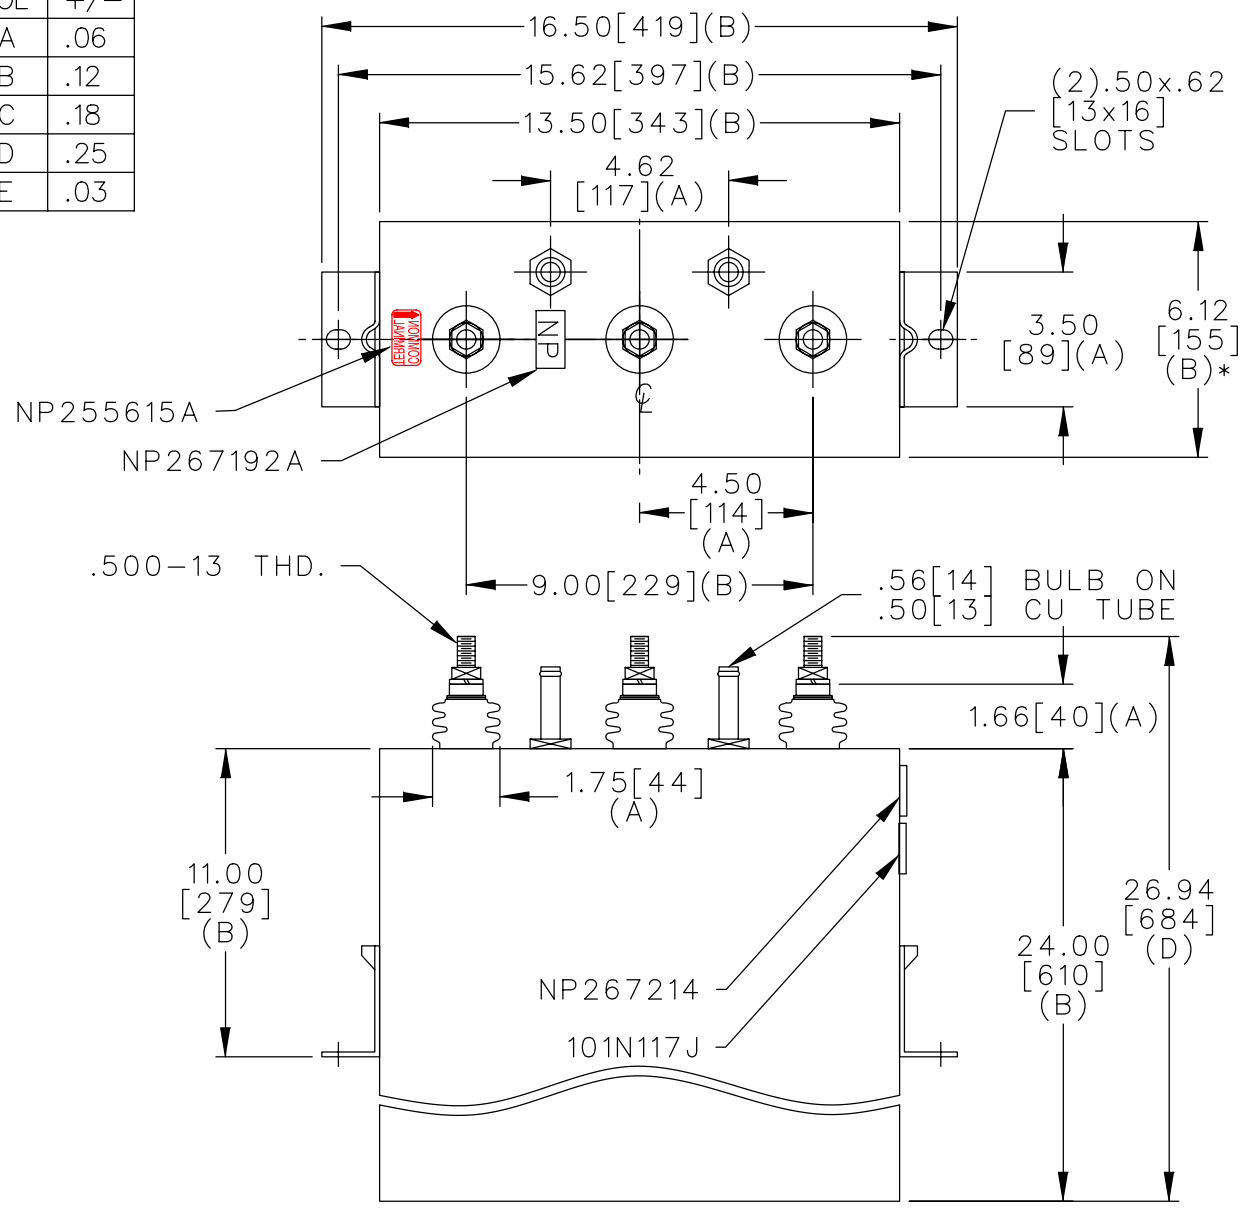

| TERM | uF | kVAR |
|------|------------|-------------|
| 1 | 318 | 67.5 |
| 2 | 318 | 67.5 |

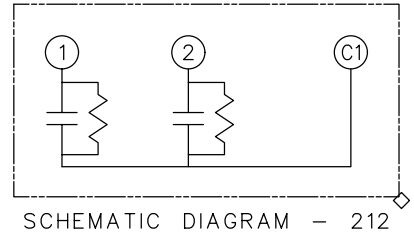

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0485WH3 SN
 135 KVAR 750V 60HZ
 2 x 318 UF/TAP
 3.3 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATION READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

| | | | | | | |
|--------|---|--------------|------------------|---------|-------------------------------------|----------|
| | CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A. | | SIZE A | FSCM NO | OUTLINE 19L0485WH3 | DISTR TO |
| | DRAWN E.McGINN | OCT 25, 1996 | SCALE | SHEET 2 | | |
| ISSUED | OCT 30, 1996 | | | | | |