



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

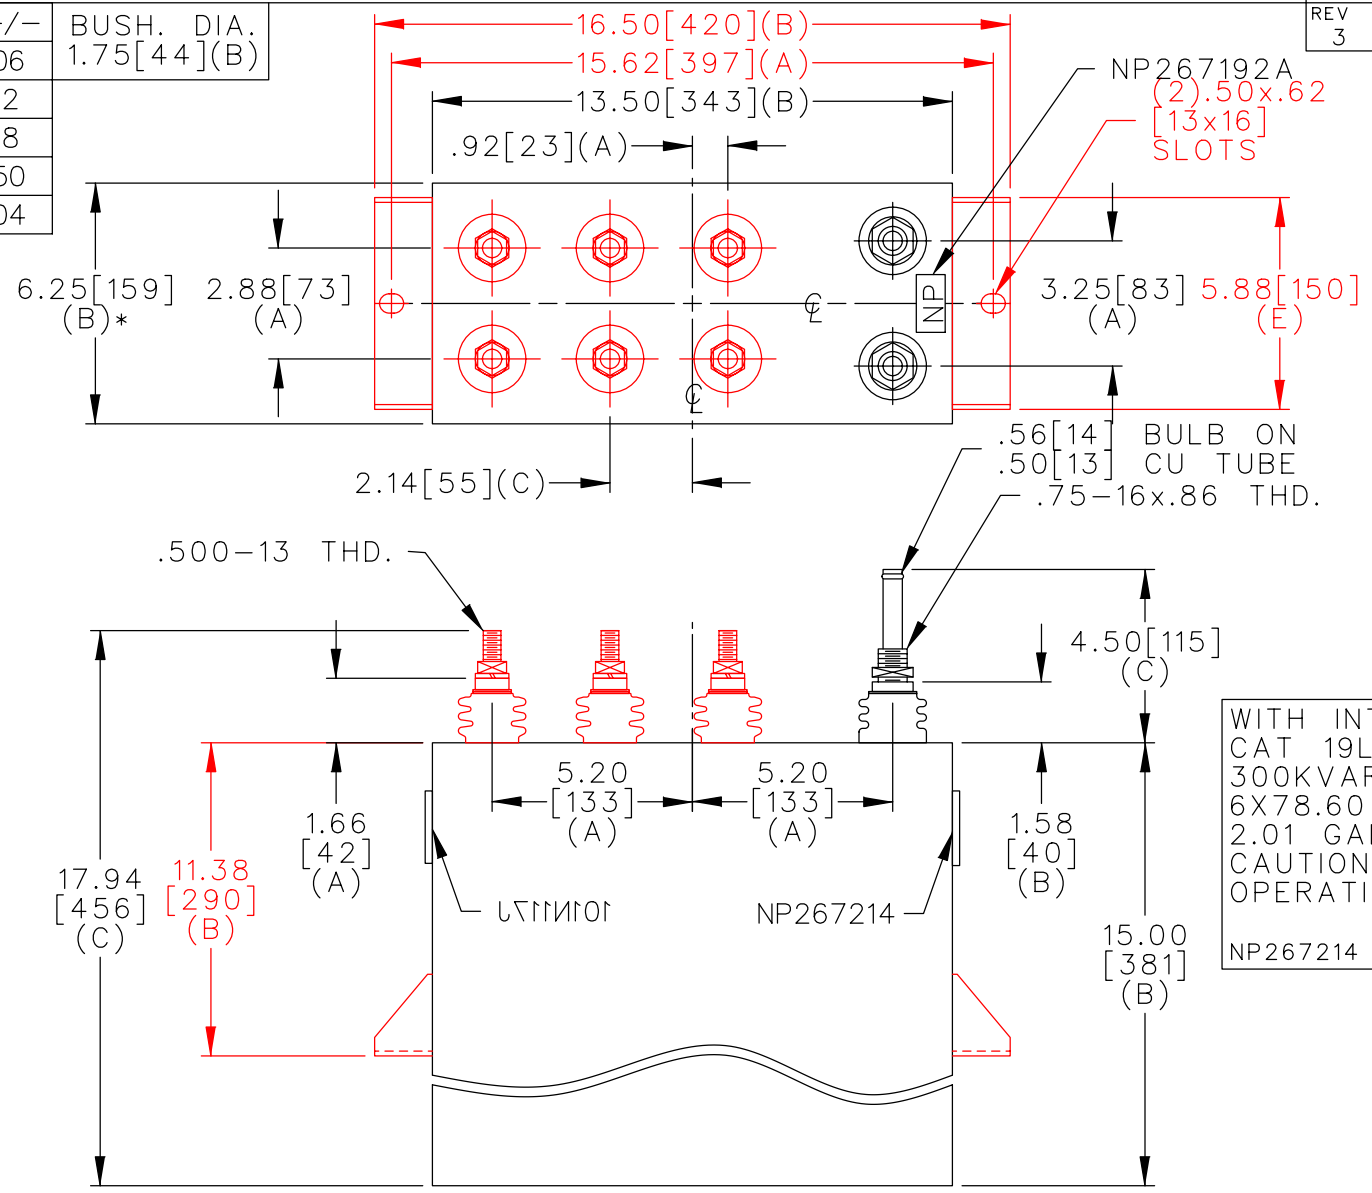

TERM	uF	kVAR
1	78.6	50
2	78.6	50
3	78.6	50
4	78.6	50
5	78.6	50
6	78.6	50

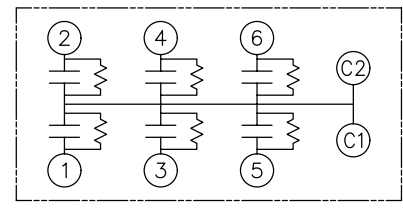

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS  
 CAT 19L0489WH3 SN  
 300KVAR 750V 180HZ 1PH  
 6X78.60 UF/TAP  
 2.01 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 66 / 30 LB/KG	<b>OUTLINE</b> <b>19L0489WH3</b>	SHEET 2 CONT. 3 ON ON
	DRAWN 02/12/97	LRD 02/12/97	SCALE WC6	version		
ISSUED 02/12/97						

DISTR TO