



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

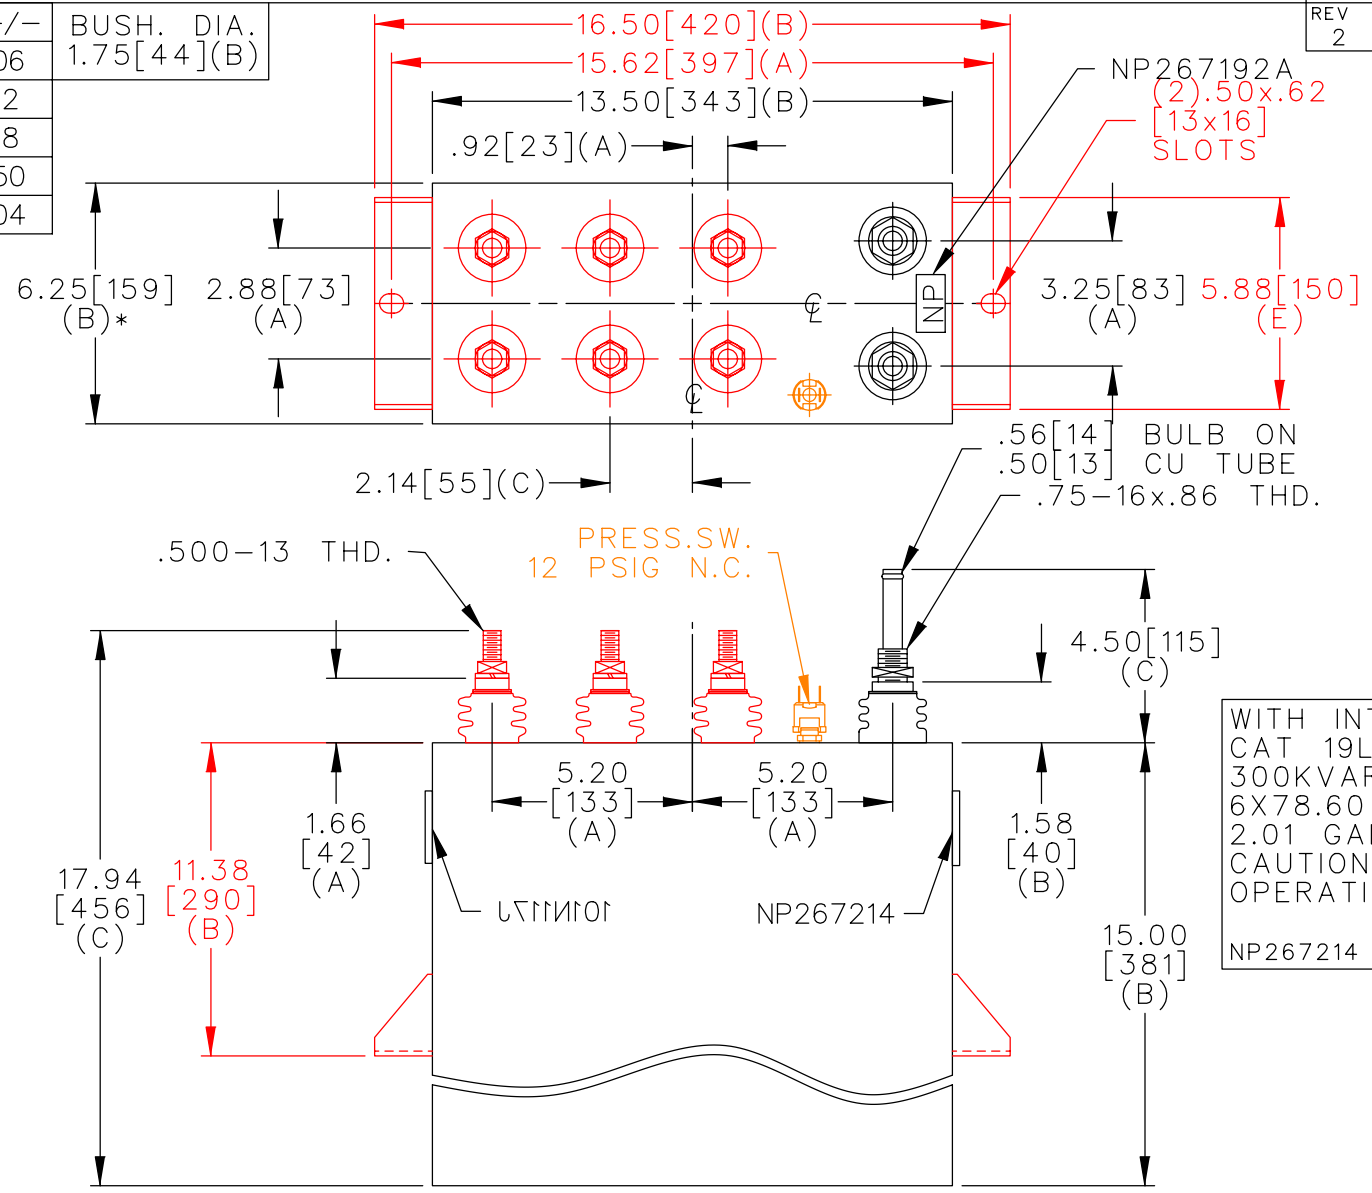

TERM	uF	kVAR
1	78.6	50
2	78.6	50
3	78.6	50
4	78.6	50
5	78.6	50
6	78.6	50

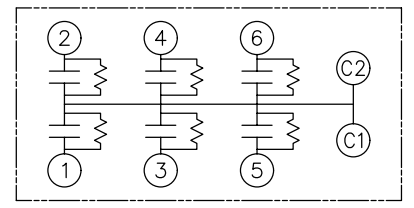

WITH INTERNAL DISCH RESISTORS
 CAT 19L0489WH4 SN
 300KVAR 750V 180HZ 1PH
 6X78.60 UF/TAP
 2.01 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 66 / 30 LB/KG	OUTLINE 19L0489WH4	SHEET 2 CONT. 3
	DRAWN 11/07/96	LRD 11/07/96				
ISSUED 11/20/96						DISTR TO