



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

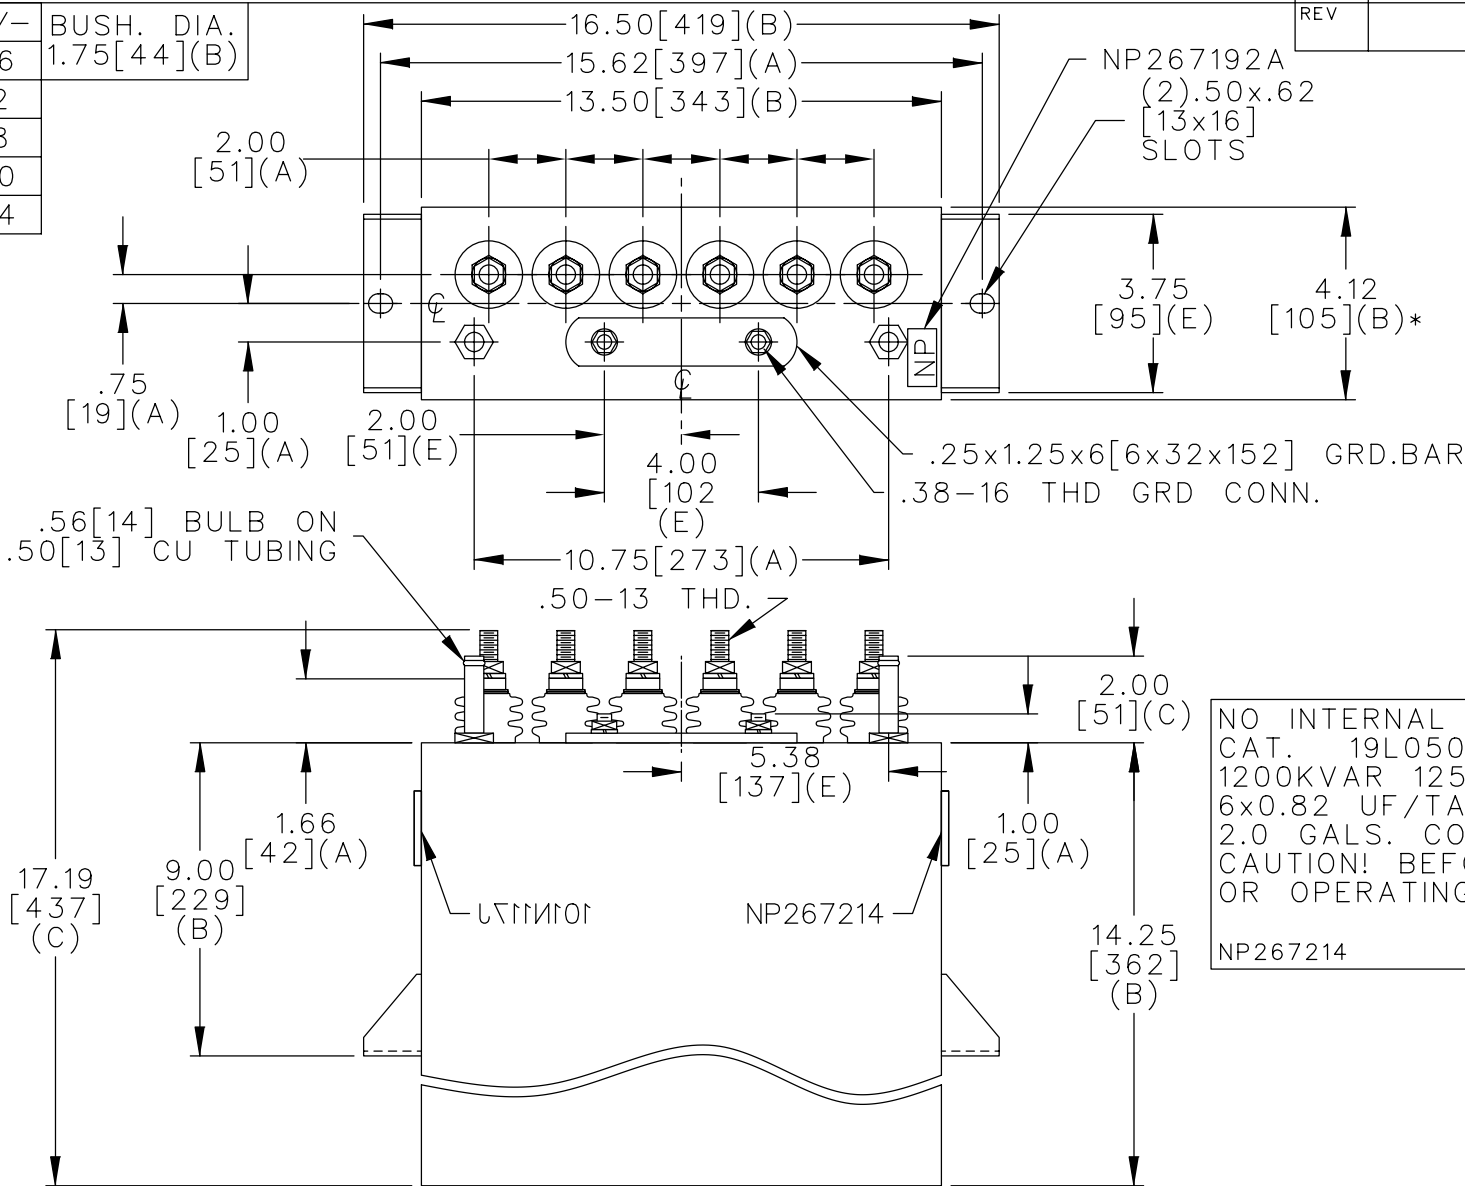

TERM	uF	kVAR
1	0.82	200
2	0.82	200
3	0.82	200
4	0.82	200
5	0.82	200
6	0.82	200

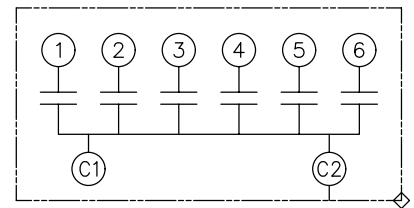

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0500WH3 SN
 1200KVAR 1250V 25000HZ 1PH
 6x0.82 UF/TAP
 2.0 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0500WH3	
	DRAWN E.McGINN	AUG. 6, 2001	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO