



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

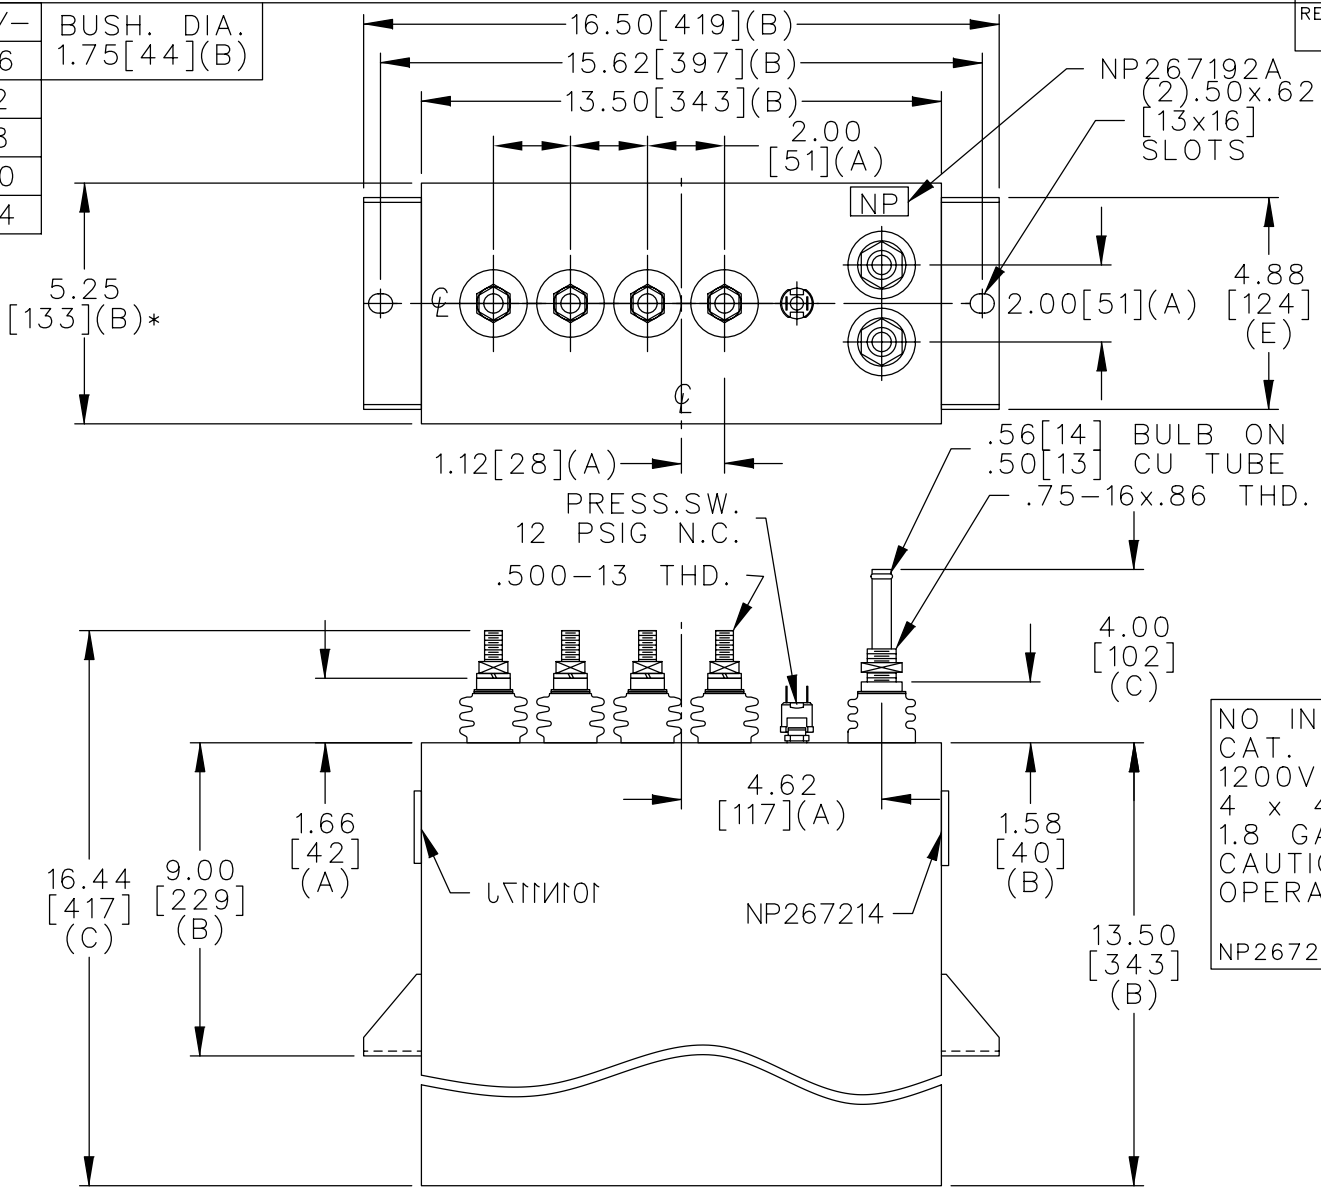

TERM	uF	kVAR
1	44.21	400
2	44.21	400
3	44.21	400
4	44.21	400

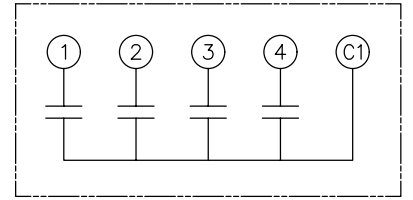

SCHEMATIC DIAGRAM - 400

NO INTERNAL DISCH RESISTORS
 CAT. 19L0534WH4 SN
 1200V 1.0KHZ 1600KVAR
 4 x 44.21 UF/TAP
 1.8 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0534WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	MAY 26, 1998	SCALE		
ISSUED	5-27-98				

DISTR TO