



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

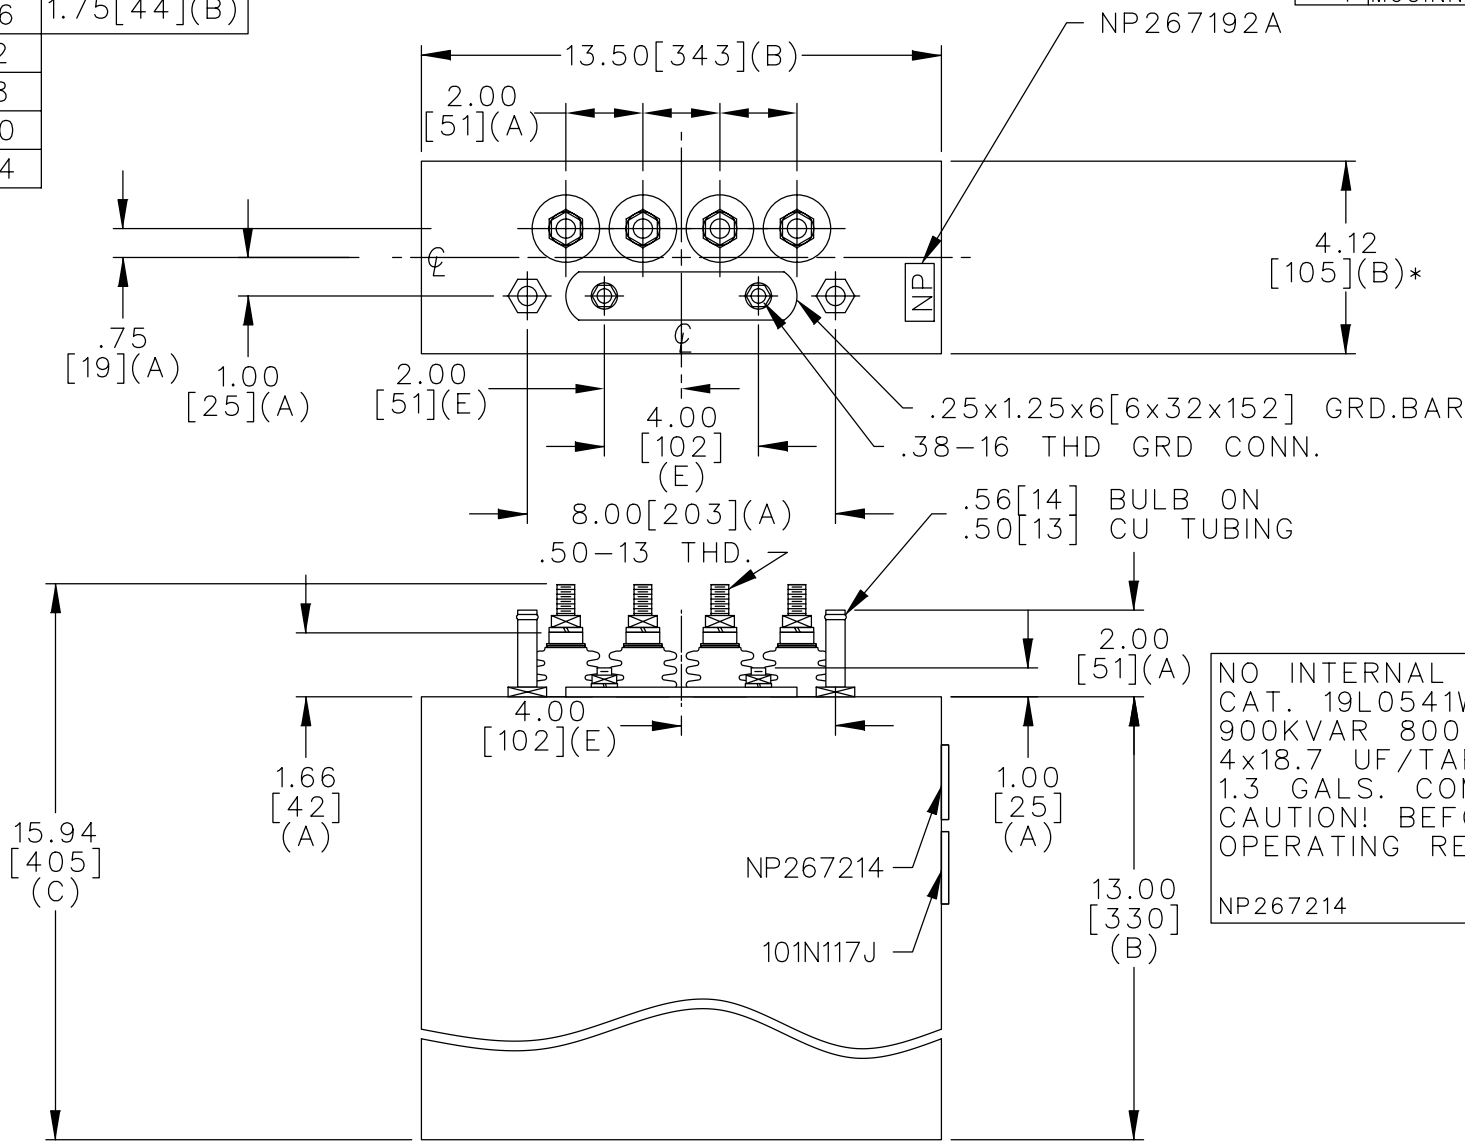

TERM	uF	kVAR
1	18.7	225
2	18.7	225
3	18.7	225
4	18.7	225

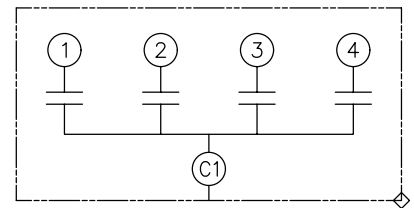

SCHEMATIC DIAGRAM - 416

NO INTERNAL DISCH RESISTORS
 CAT. 19L0541WH1 SN
 900KVAR 800V 3000HZ 1PH
 4x18.7 UF/TAP
 1.3 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0541WH1	SHEET 2 CONT. ON -
	DRAWN E.McGINN	DEC. 16, 1996	SCALE		
ISSUED	12-18-96	DISTR TO			