



19L0554W

TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

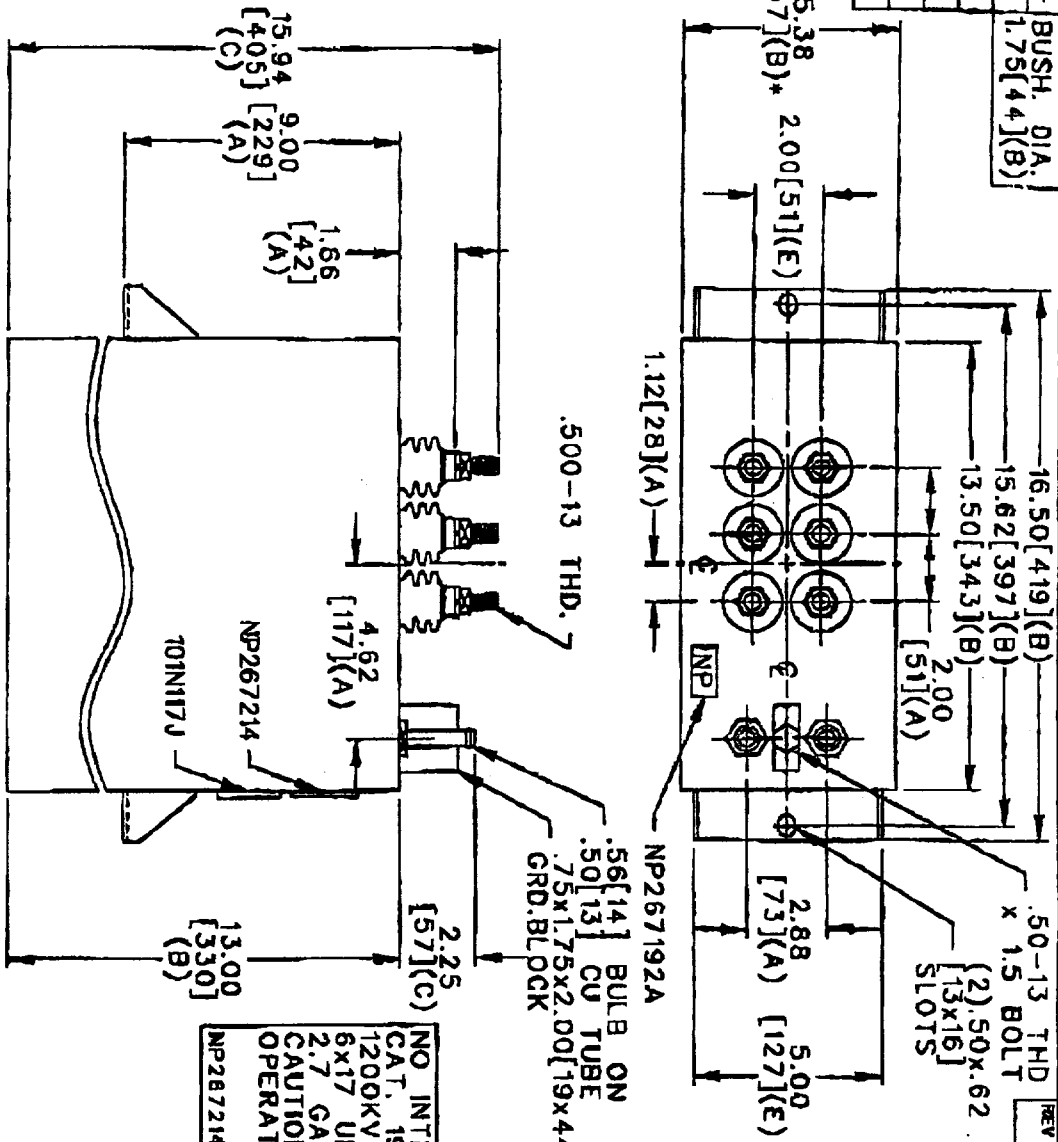

TERM	UF	KVAR
1	17	200
2	17	200
3	17	200
4	17	200
5	17	200
6	17	200



NO INTERNAL DISCH RESISTORS
 CAT. 19L566WH3 SN
 1200KVAR 1250V 1200HZ 1PH
 6x17 UF/TAP
 2.7 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP287214

* UP TO +.50[13]
 CASE BULGE
 MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS
 NP267192A

ISSUED 11-83-94
 DRAWN E. MCGINN
 NOV. 18, 1996
 CAPACITOR & POWER PROTECTION
 FORT EDWARD, N.Y., U.S.A.

SIZE A
 SCALE
 OUTLINE
 19L0566WH3
 SHEET 2 CONT. ON

REV	DATE	REV
A		

DISTR TO