



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

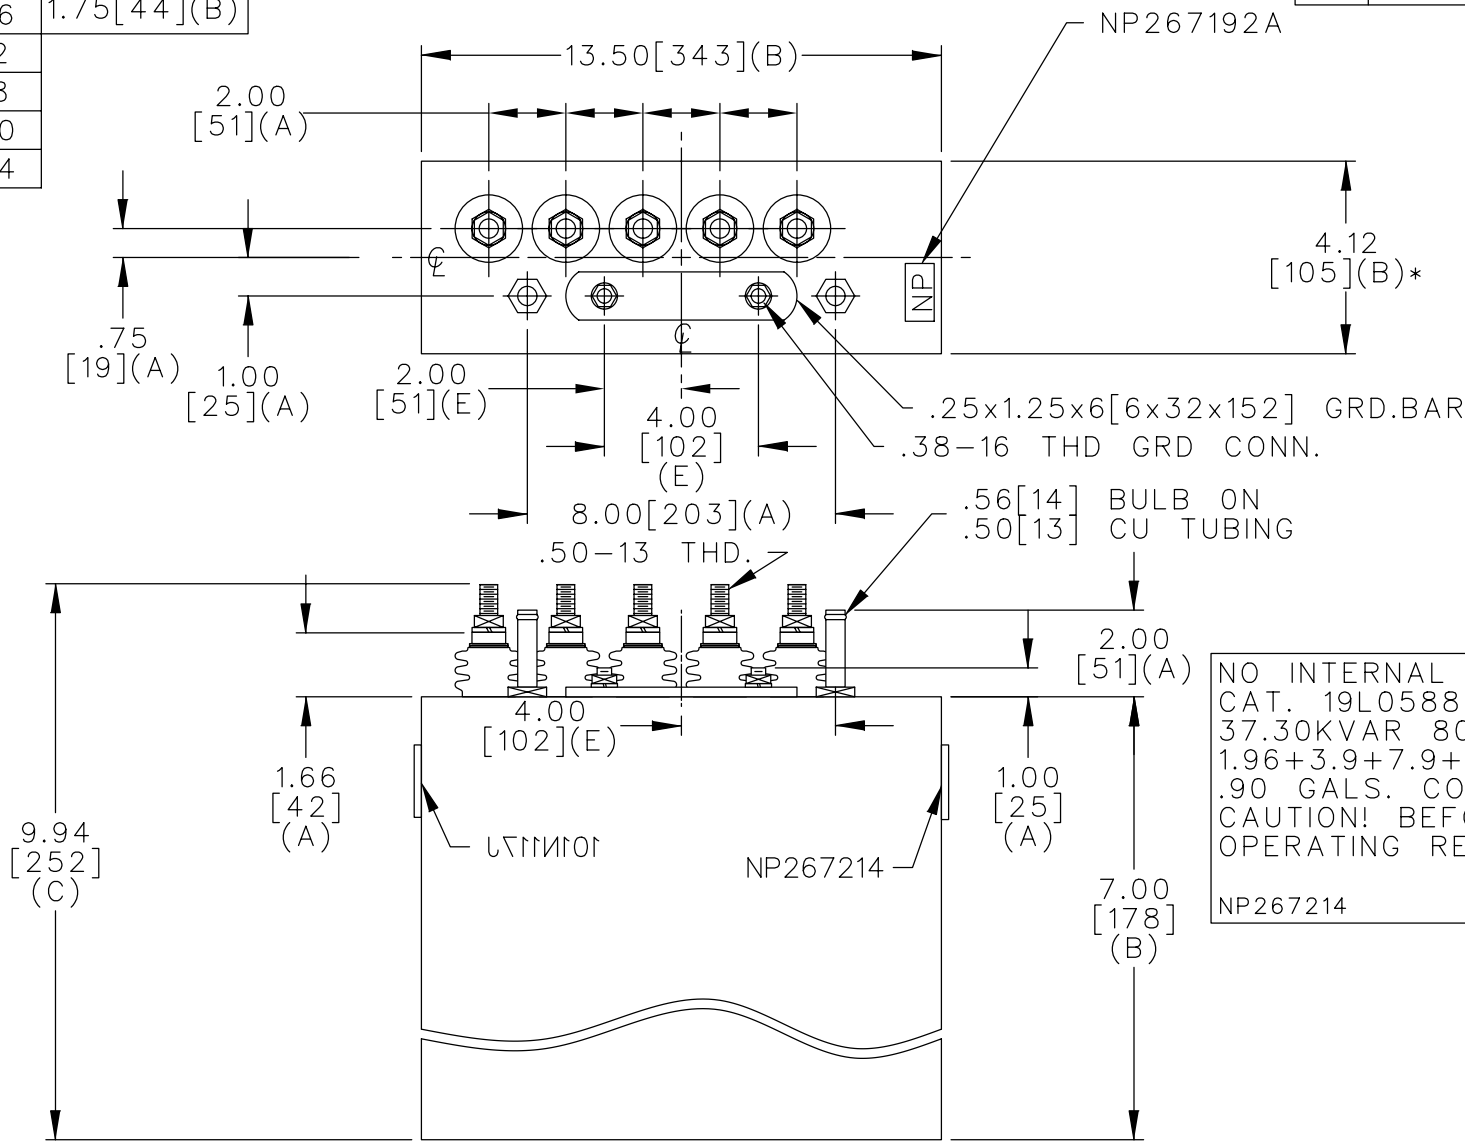

TERM	uF	kVAR
1	1.96	23.7
2	3.9	47.3
3	7.9	94.7
4	11.8	142.1
5	11.8	142.1

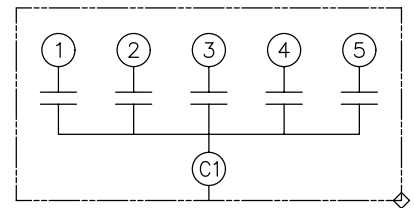

SCHEMATIC DIAGRAM - 501

NO INTERNAL DISCH RESISTORS
 CAT. 19L0588WH1 SN
 37.30KVAR 800V 3000HZ 1PH
 1.96+3.9+7.9+2x11.8 UF/TAP
 .90 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0588WH1	SHEET 2 CONT. ON -
	DRAWN E.McGINN	MAR. 1, 2000			
ISSUED				DISTR TO	