



19L0602WH

TOL	+/-	BUSH. DIA.
A	.06	1.75[4.4](B)
B	.12	
C	.18	
D	.50	
E	.04	

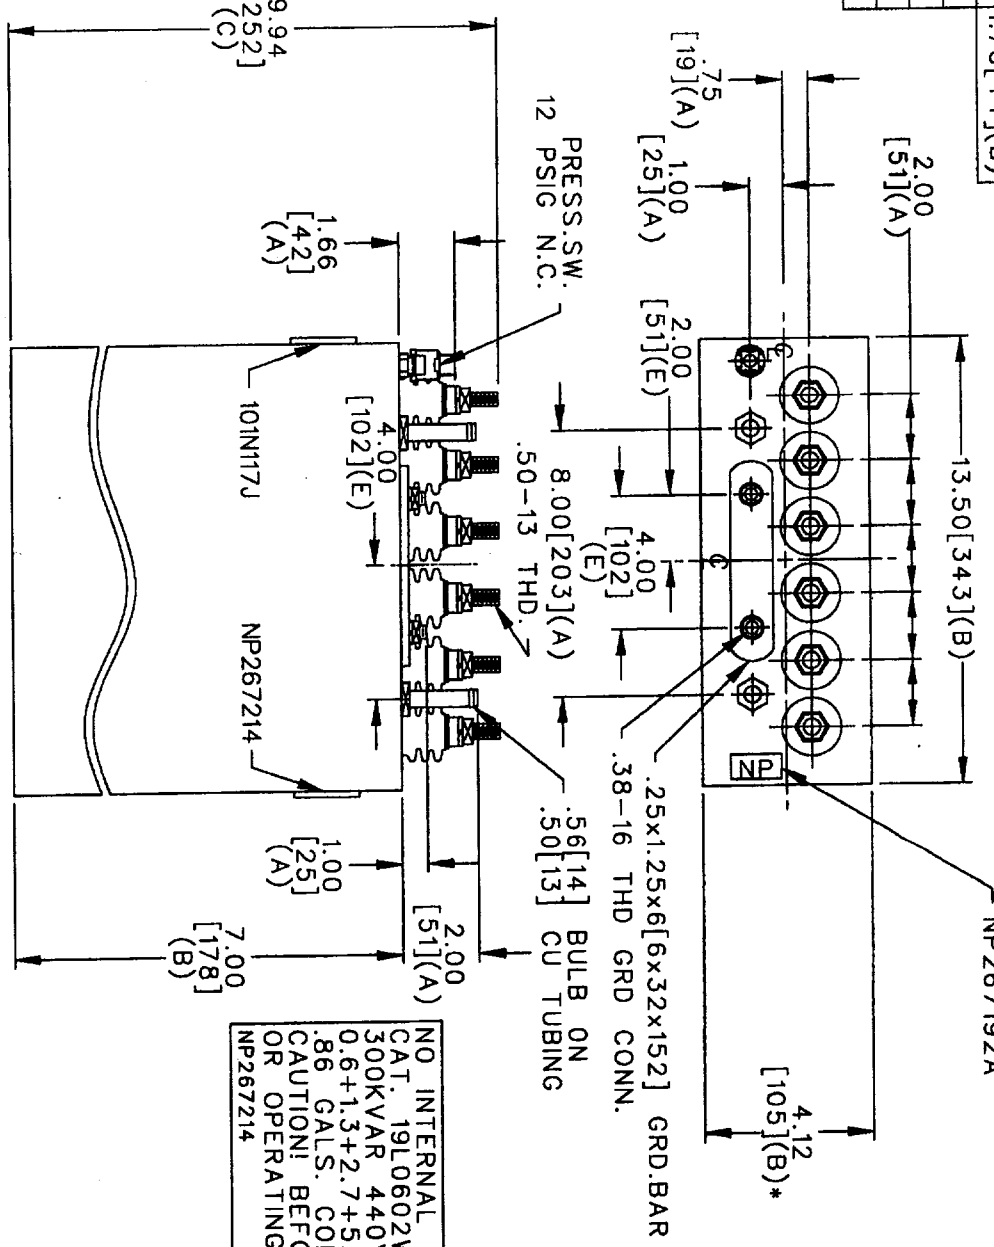

NP267192A

TERM	UF	KVAR
1	0.634	7.4
2	1.28	15.0
3	2.67	31.2
4	5.24	61.2
5	7.93	92.6
6	7.93	92.6

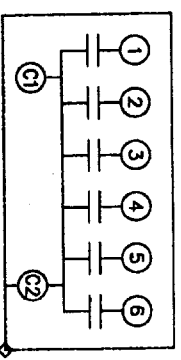

NO INTERNAL DISCH RESISTORS
 CAT. 19L0602WH2
 300KVAR 440V 9600HZ 1PH
 0.6+1.3+2.7+5.2+2x7.9 UF/TAP
 .86 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE
 MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS
 NP267192A

ISSUED 1-28-98
 DRAWN E. MCGINN
 JAN. 28, 1998
 CAPACITOR & POWER PROTECTION
 FORT EDWARD, N.Y., U.S.A.

SIZE A
 SCALE
 SHEET 2 CONT. ON -
OUTLINE
19L0602WH2

REV	DWG NO.	SH	REV
1	19L0602WH2		
1	MCGINN UPDATE CAT NO	DATE	9-1-99

DISTR TO