



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

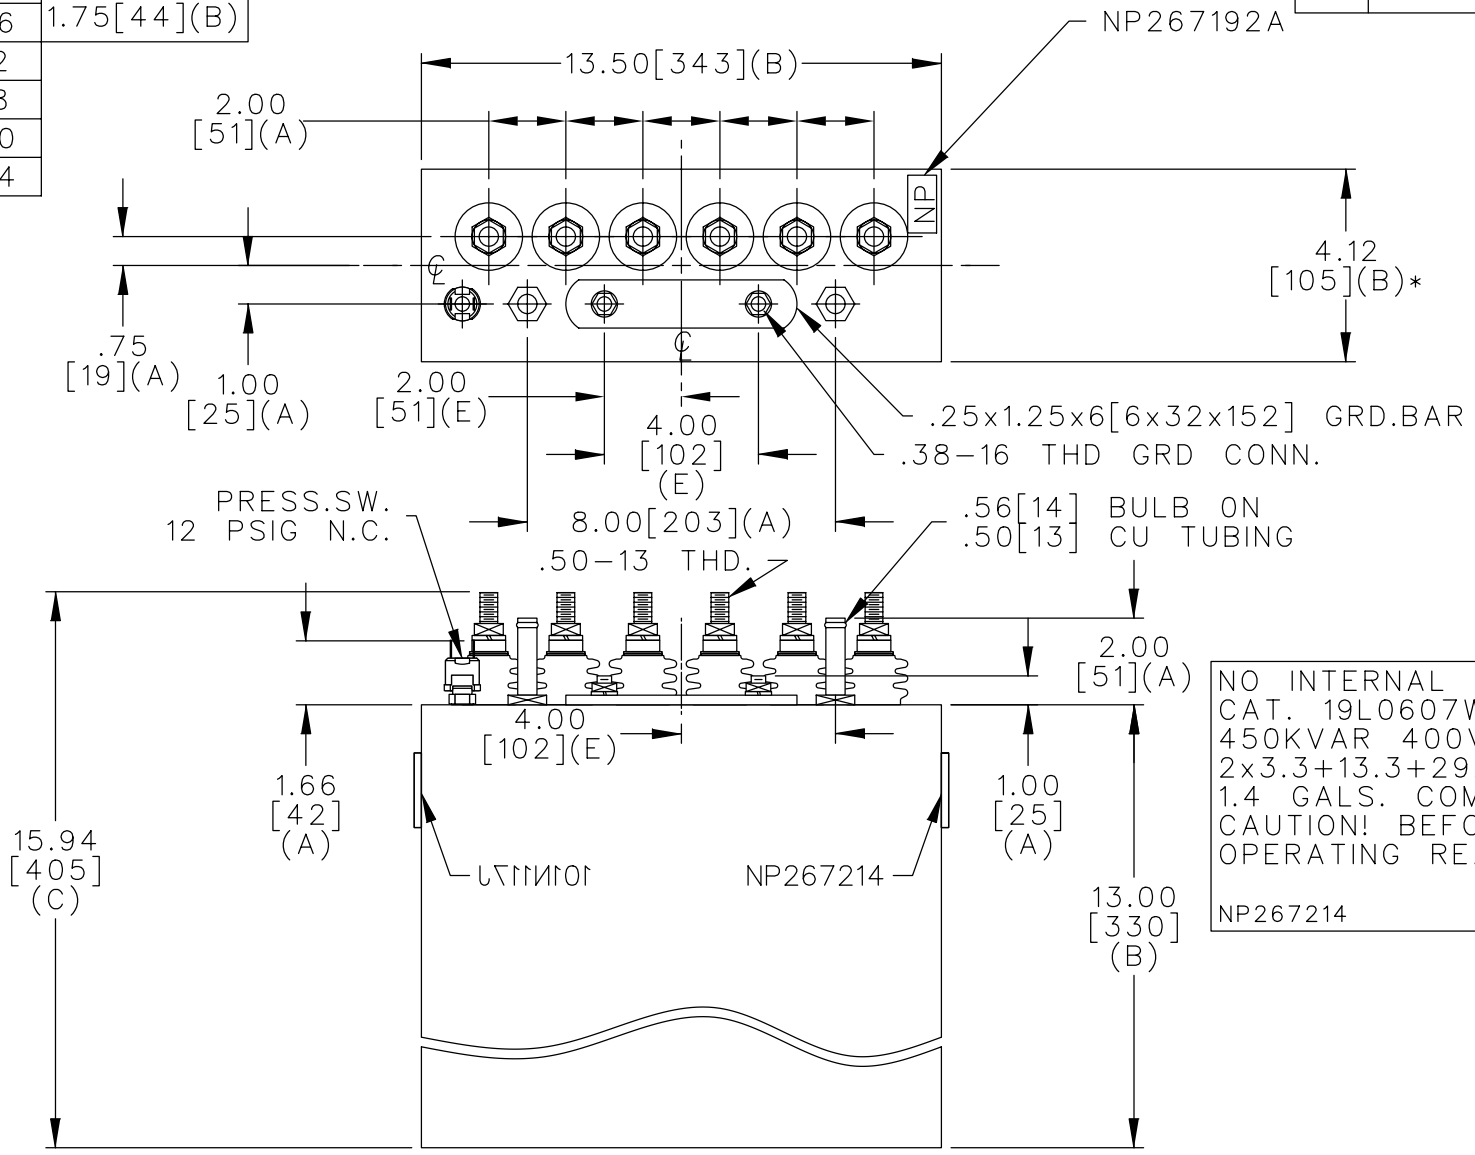

TERM	uF	kVAR
1	3.3	10
2	3.3	10
3	13.3	40
4	29.8	90
5	49.7	150
6	49.7	150

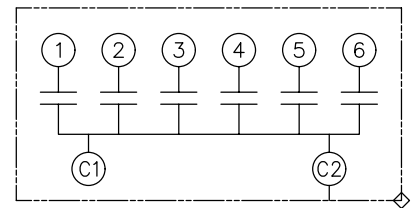

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0607WH2 SN
 450KVAR 400V 3000HZ 1PH
 2x3.3+13.3+29.8+2x49.7 UF/TAP
 1.4 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0607WH2	SHEET 2 CONT. ON -
	DRAWN E.McGINN	APR. 16, 1997	SCALE		
ISSUED				DISTR TO	