




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

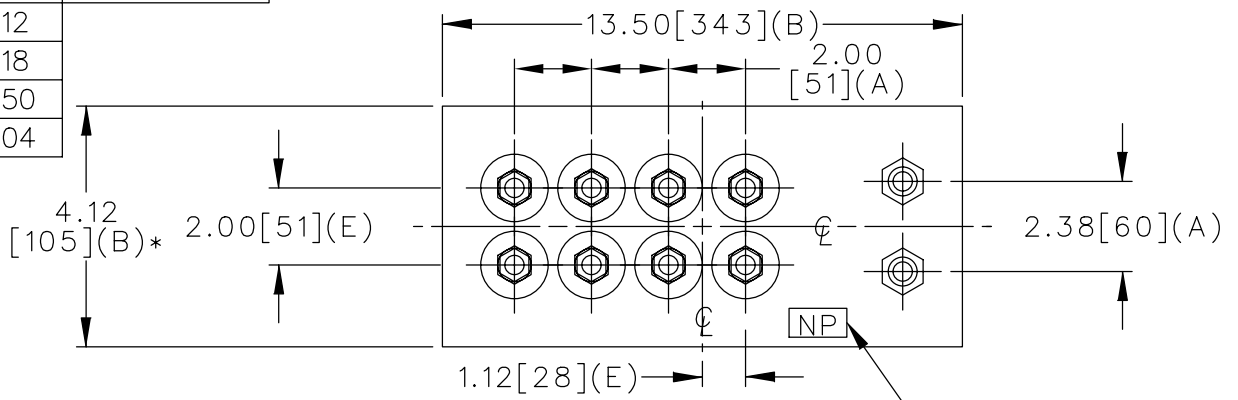

TERM	uF	kVAR
1	4.35	614.25
2	4.35	614.25
3	4.35	614.25
4	4.35	614.25

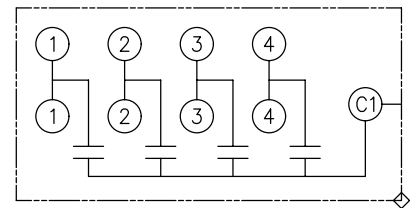

SCHEMATIC DIAGRAM - 411

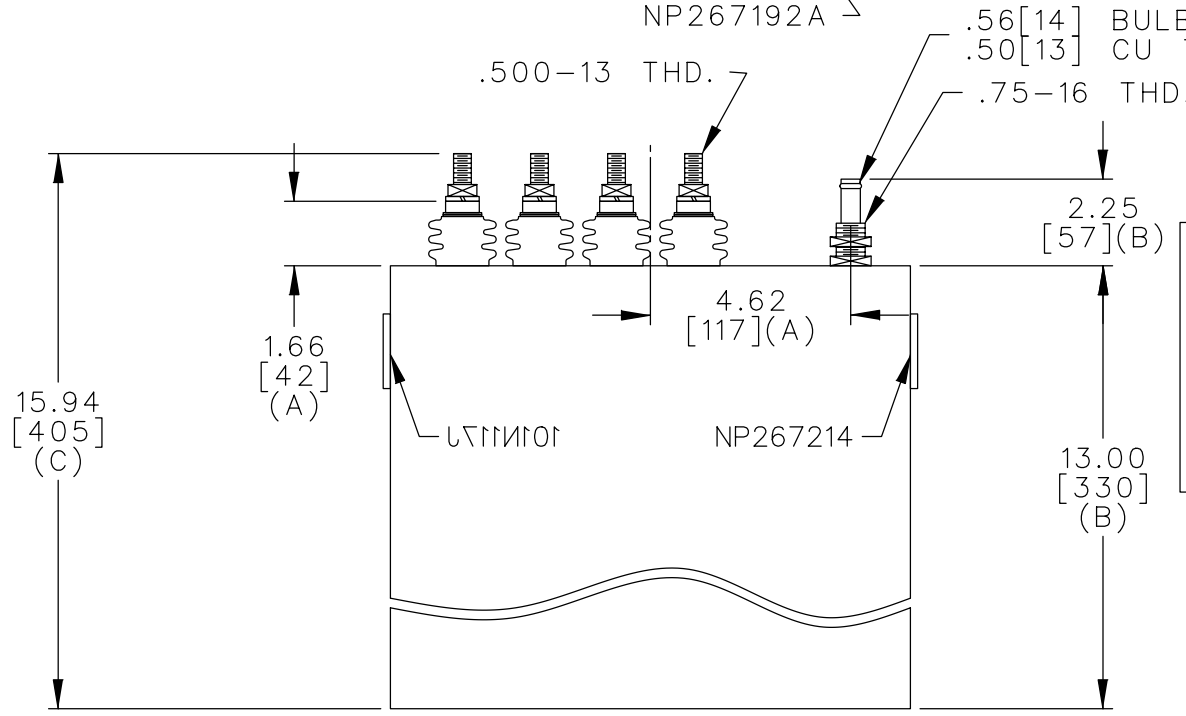

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0697WH1 SN  
 2457KVAR 1500V 10000HZ 1PH  
 4 X 4.35 UF/TAP  
 1.4 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0697WH1</b>		SHEET 2	CONT. ON -
	DRAWN E.McGINN	AUG. 4, 1998	SCALE				
ISSUED 8-5-98							

DISTR TO