



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

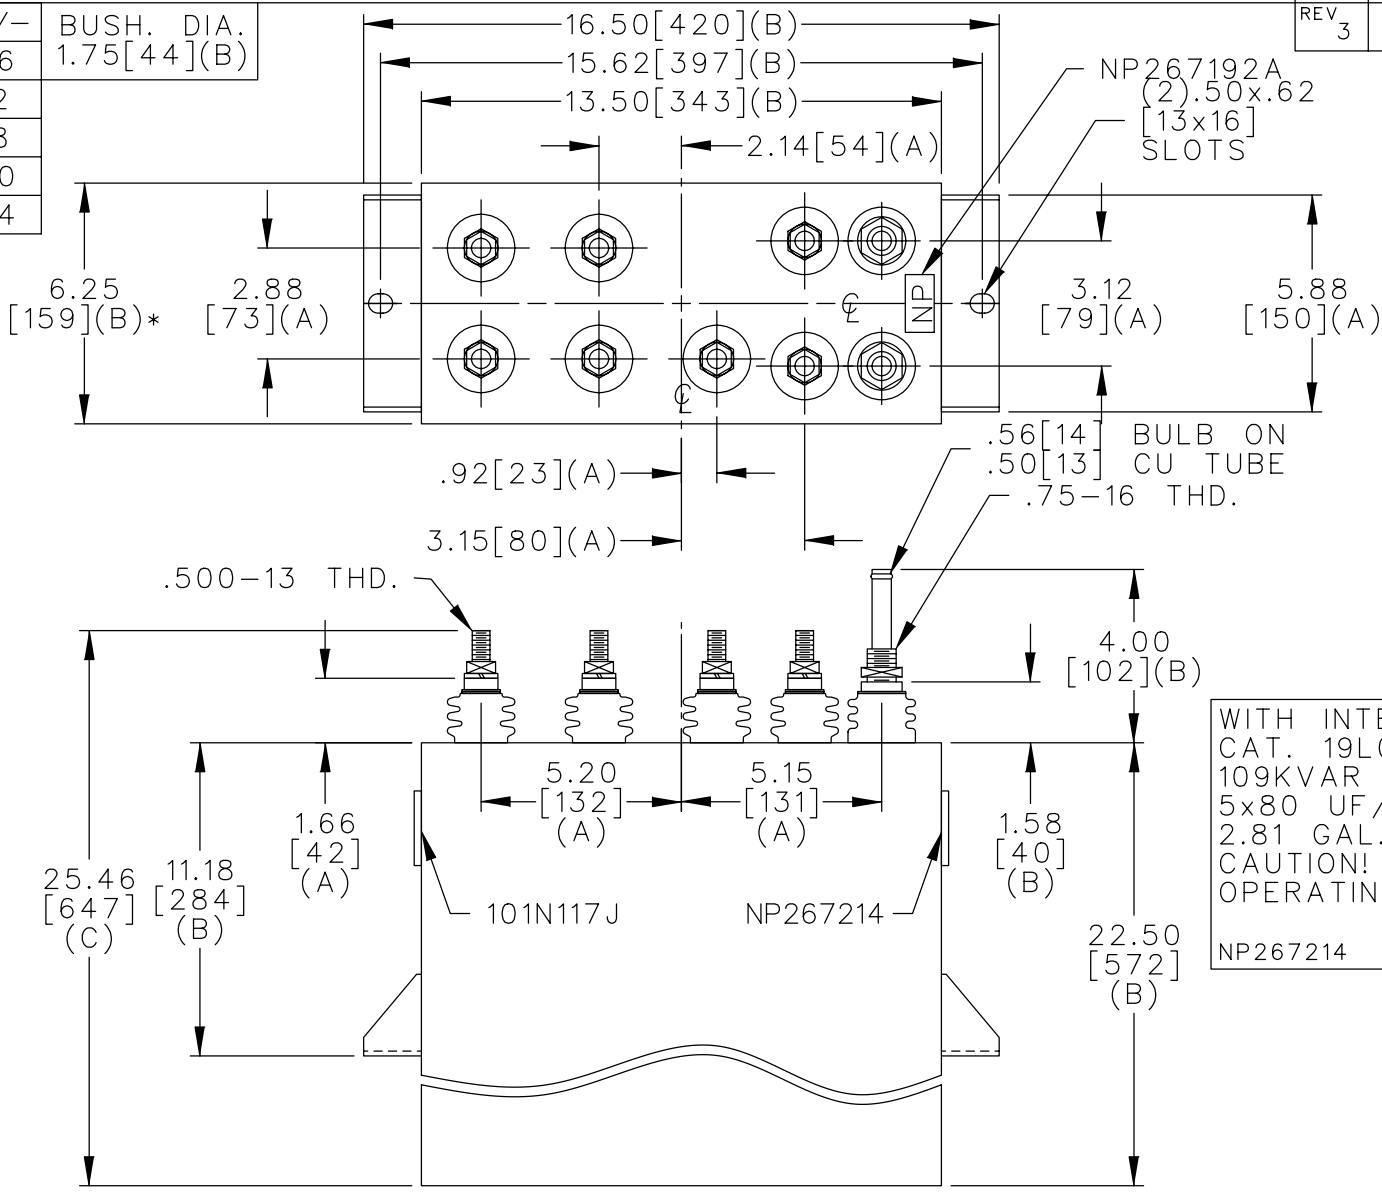

TERM	NOMINAL uF +15% -0%
1	80.0
2	80.0
3	80.0
4	80.0
5	80.0

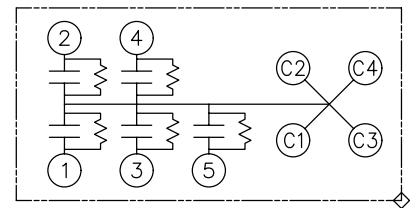

SCHEMATIC DIAGRAM - 537

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0713WH3 SN
 109KVAR 850V 60HZ 1PH
 5x80 UF/TAP
 2.81 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0713WH3	SHEET 2 CONT. 3 ON 3
	DRAWN E.MCGINN	DEC. 20, 1996	SCALE		
ISSUED	1-8-97	DISTR TO			