
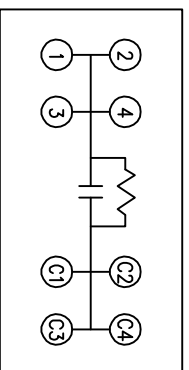


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

SIZE	DWG NO	SHT	REV
A	19L0918WH4	2	2
REV	DESCRIPTION	DATE	APPROVED
2	GAL WAS 7.7	5/25/06	BTR

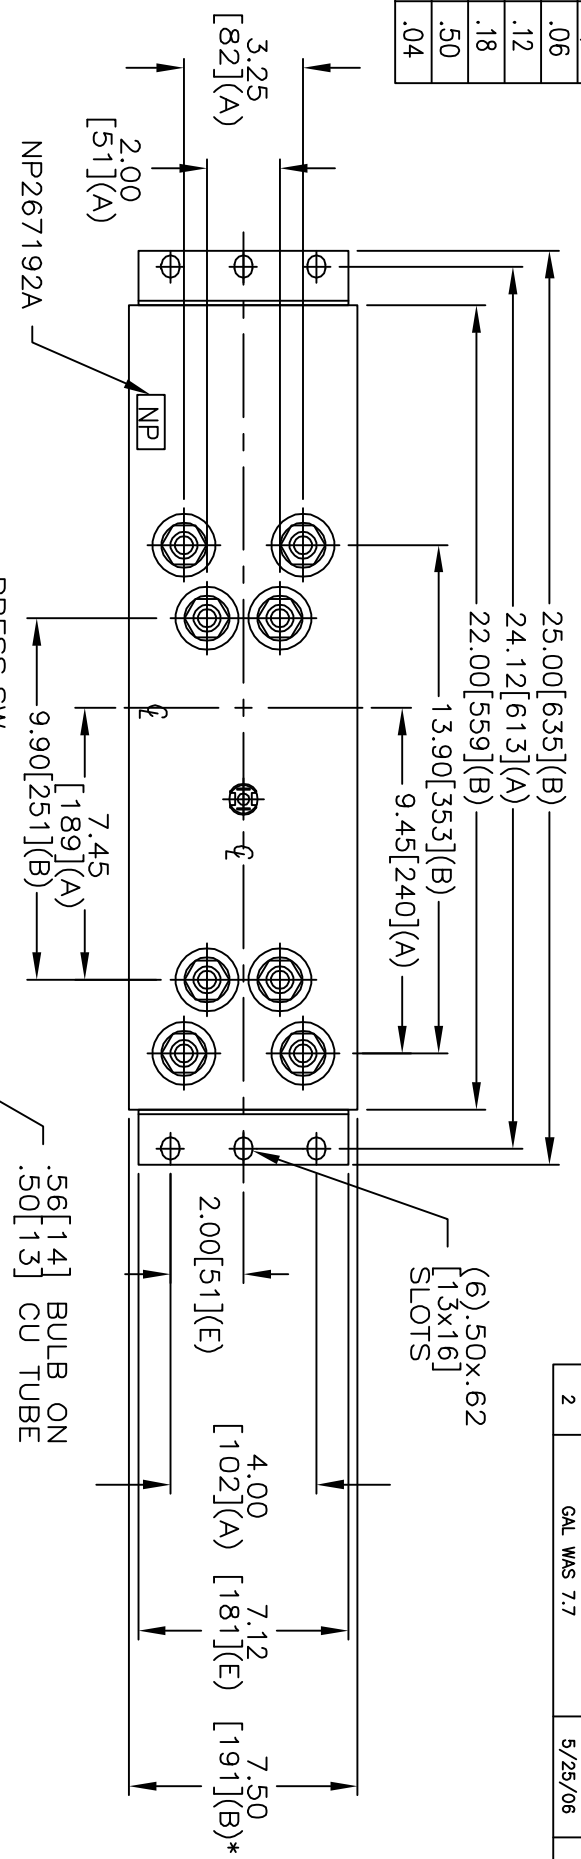

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0918WH4 SN
 8400KVAR 3000V 700HZ 1PH
 212.21 UF
 5.8 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

* UP TO +.75[19]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS
 FORT EDWARD, N.Y., U.S.A.

DRAWN E. McGinn
 DATE 12/10/1998

ISSUED DATE 12/16/1998

SIZE A

SCALE

OUTLINE

19L0918WH4

SHEET 2 CONT 3