



19L678WH

TOL	+/-	BUSH. DIA.
A	.06	1.75 [4.4] (B)
B	.12	
C	.18	
D	.50	
E	.04	

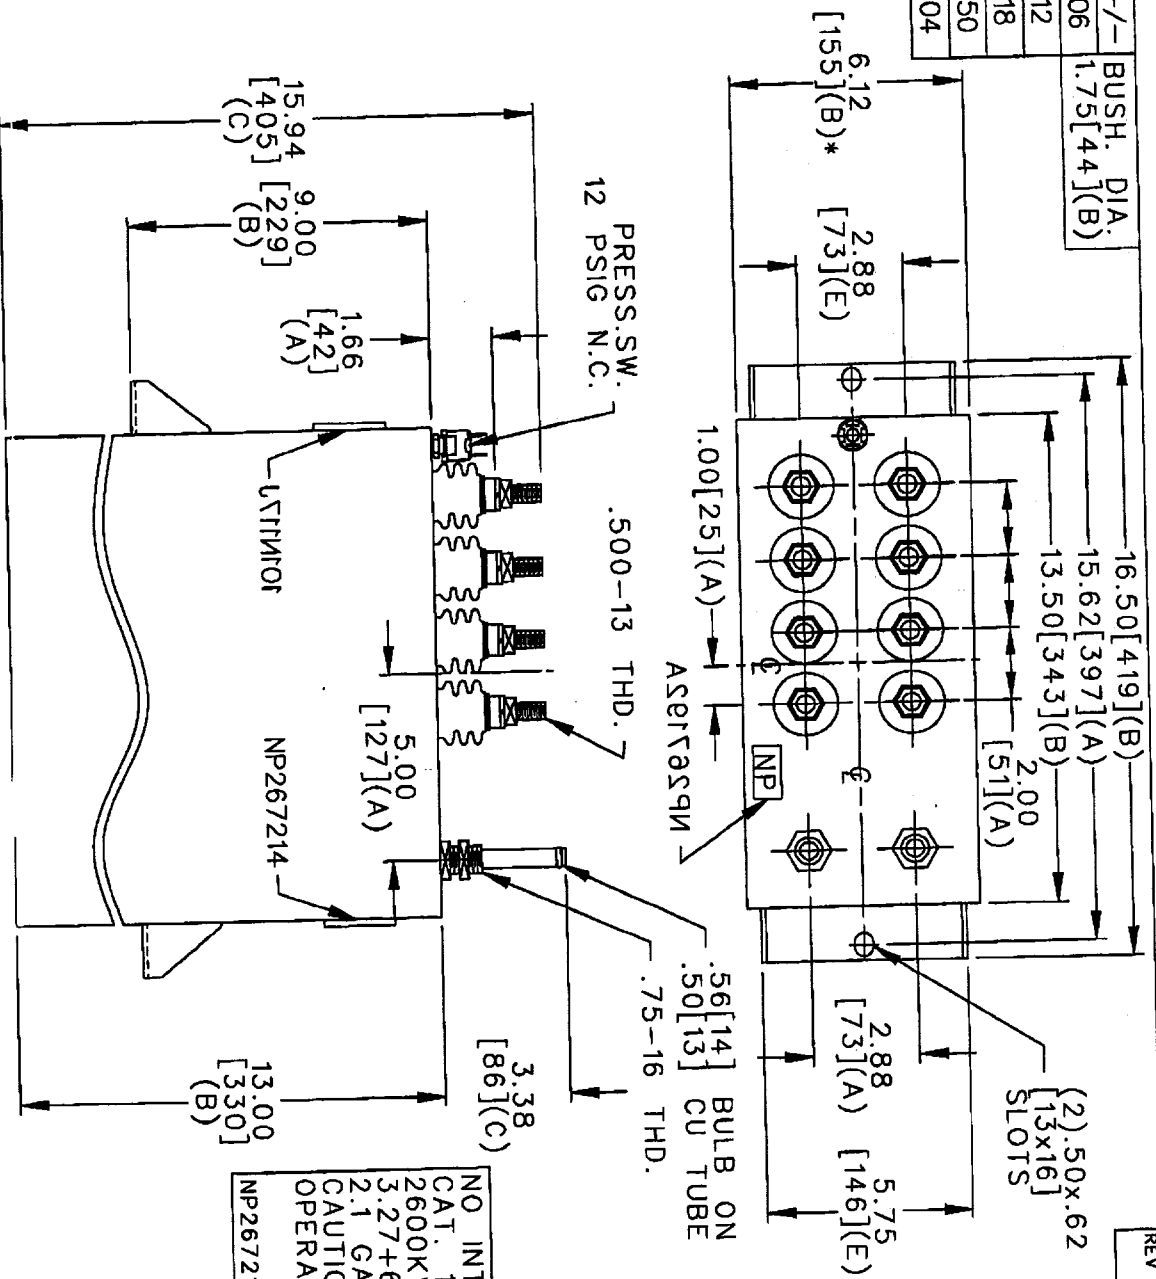

SIZE	DWG. NO.	SH.	REV.
A	19L678WH4		
REV	DATE		

TERM	UF	KVAR
1	3.27	96
2	6.53	192
3	13.08	385
4	13.08	385
5	13.08	385
6	13.08	385
7	13.08	385
8	13.08	385

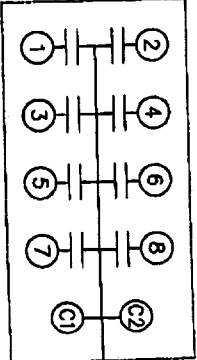

NO INTERNAL DISCH RESISTORS
 CAT. 19L678WH4 SN
 2600KVAR 1250V 3000HZ 1PH
 3.27+6.53+6x13.08 UF/TAP
 2.1 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

GE CAPACITOR & POWER PROTECTION
 FORT EDWARD, N.Y., U.S.A.

DRAWN E.M.GINN JULY 9, 1997

SIZE A SCALE

SHEET 2 CONT. -

19L678WH4

DISTR TO