


19L700WH


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

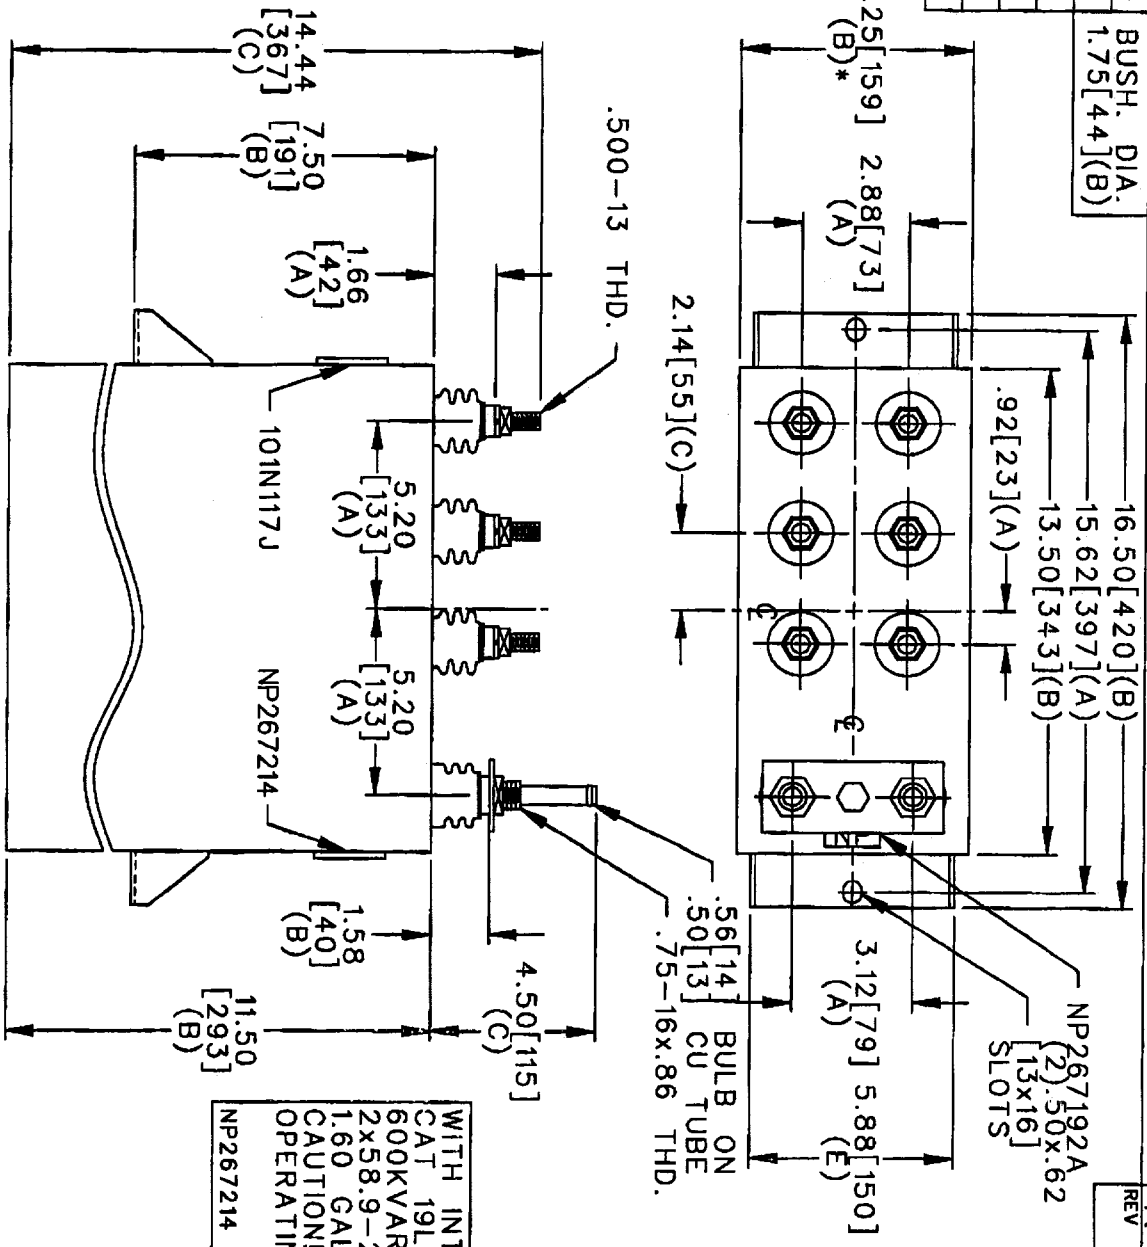

[Handwritten signature]

SIZE	DWG NO.	SH	REV
A	19L700WH3		
REV	DATE		

TERM	UF	KVAR
1	58.95	200
2	58.95	200
3	29.47	100
4	14.74	50
5	7.37	25
6	7.37	25

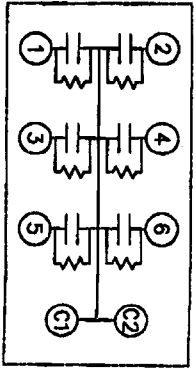

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT 19L700WH3 SN 540HZ 1PH
 600KVAR 1000V
 2x58.9-29.4-14.7-2x7.4UF/TAP
 1.60 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS
 NP267192A

36 CAPACITOR & POWER PROTECTION
 FORT EDWARD, N.Y., U.S.A.

DRAWN E. MCGINN OCT. 10, 1997

ISSUED

SCALE **A**

SIZE UNIT WEIGHT
 51 / 23
 LB/KG

SHEET 2 CONT. 3

19L700WH3

OUTLINE

DISTR TO