



19L0270WH4

TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

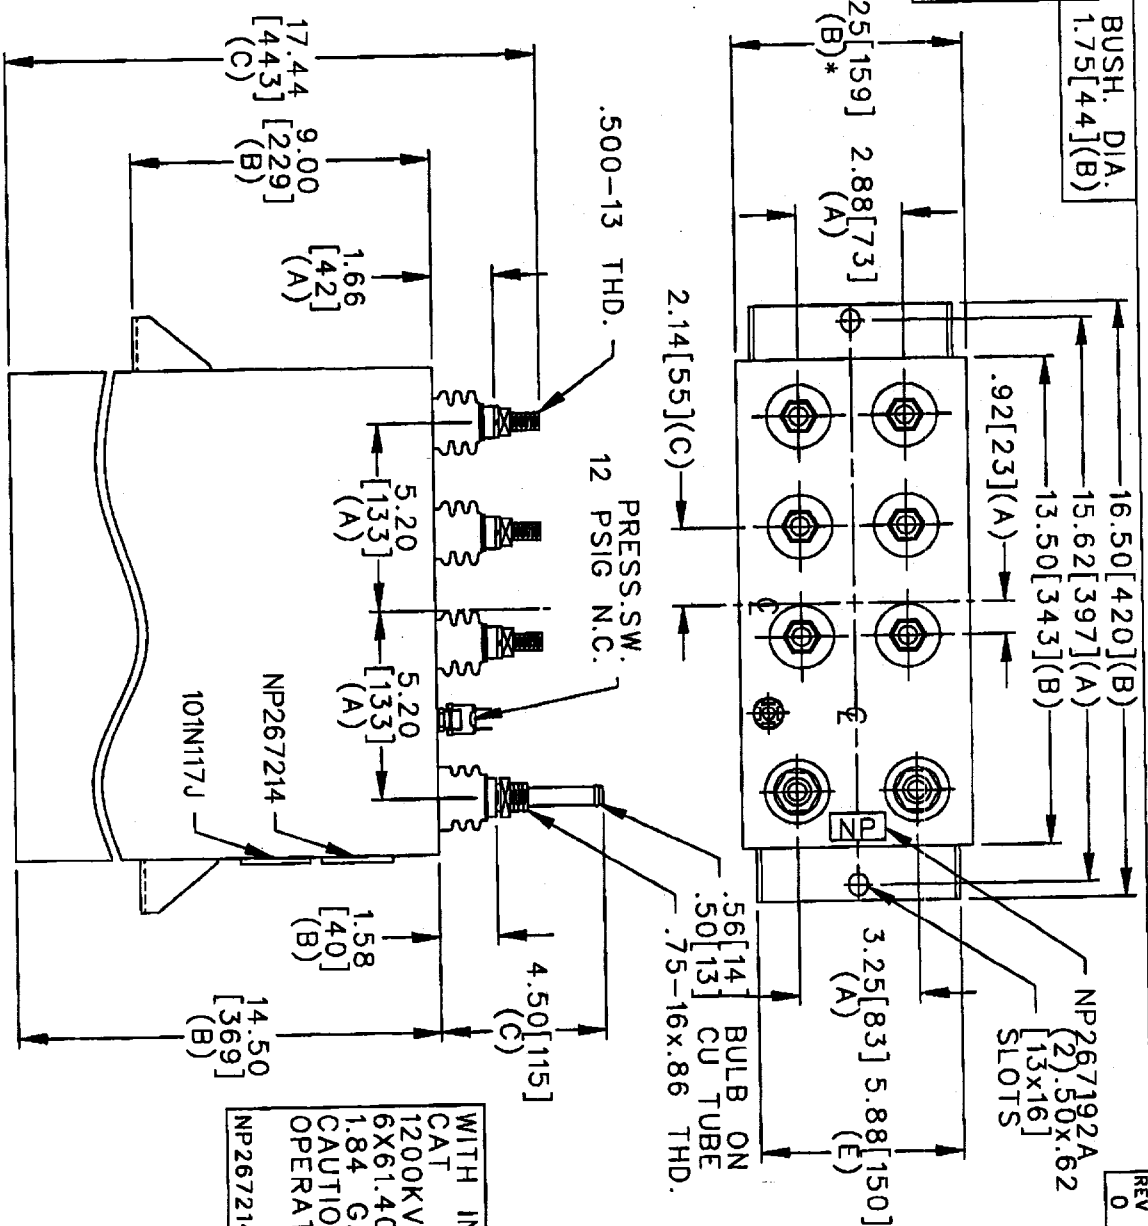

TERM	UF	KVAR
1	61.40	200
2	61.40	200
3	61.40	200
4	61.40	200
5	61.40	200
6	61.40	200

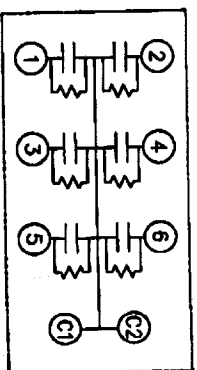

WITH INTERNAL DISCH RESISTORS
 CAT 19L 270WH4 SN
 1200KVAR 720V 1000HZ 1PH
 6X61.40 UF/TAP
 1.84 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

SIZE	DWG NO.	SH	REV
A	19L 0270WH4		
0			
REV	DATE	SH	REV
0	NEW 02/17/97		

GE CAPACITOR & POWER PROTECTION
 FORT EDWARD, N.Y., U.S.A.

DRAWN 02/17/97 LRD 02/17/97
 ISSUED

SIZE	UNIT WEIGHT
A	66 / 30 LB/KG

OUTLINE
 19L0270WH4

SHEET	CONT.
2	3

DISTR TO